Integrated Rurban Development and Climate Resilience Project (IRDCRP)

Ministry of Agriculture, Livestock, Lands and Irrigation



Social Screening Report (SSR) and Social Management Plan (SMP) of

Rehabilitation of DC 03 & SDC 3of Track 03, LBMC of Lunugamwehera Scheme, Tissamahara Division, Hambanthota District

(Department of Irrigation)

Social Development Section-IRDCRP
October 19, 2026

LIST OF ABBREVIATIONS

ID	Department of Irrigation
PID	Provincial Irrigation Department
ASC	Agrarian Service Center
AP	Affected Party
CBO	Community Based Organization
C-EMP	Contractor's Environmental and Social Management Plan
DAD	Department of Agrarian Development
DS	Divisional Secretary
ES	Environmental Section
ESF	Environmental and Social Framework
ESHS	Environmental, Social, Health and Safety
EMP	Environmental and Social Management Plan
ESS	Environmental and Social Standard
FO	Farming Organization
GBV	Gender Based Violation
GN	Grama Niladhari
GoSL	Government of Sri Lanka
GRC	Grievance Redress Committee
GRM	Grievance Redress Mechanism
HH	Household
IP	Indigenous People
IRDCRP	Integrated Rurban Development and Climate Resilience Project
MoALLI	Ministry of Agriculture, Livestock, Lands and Irrigation
NGOs	Non-Government Organizations
OHS	Occupational Health and Safety
PDOs	The Project Development Objectives
PMU	Project Management Unit
PPE	Personal Protective Equipment
SSDS	Senior Social Development Section
SDS	Social Development Section
SEA	Sexual Exploitation and Abuse
SEA	Sexual Exploitation and Abuse
SMP	Social Management Plan
SH	Sexual Harassment
SSDS	Senior Social Development Specialist
SSR	Social Screening Report

WB World Bank

Table of Contents

01). Introduction....4
02). Socio economic demographic background....5
03). Project cognizance:....6
04). Intervention activities:....6
05). Existing issues of Farming Community.....6
06). Impact area:....6
17). Land ownership status of the project area.....14
08). Consultations:....15
09). Social Screening....15
10). Screening decision on impact categorization:....18
11). Recommendations:....18
12). Safeguard Implementation and Monitoring.....19
13). Report preparation:....19
Annex 01: Social Screening Checklist.....20
Annex 02: Consultation Note of Social screening....29
Annex 3: Farmer organization meeting minutes....32
Annex 04: Social Management Plan (SMP)....39
Annex 05: Individual Code of Conduct (with Sinhala Version)....46
Annex 06: composition of the GRCs.....54
Annex 07: Legal Framework and World Bank's ESF Policy and Standards....56
Annex 08: Contingency plan....57
Annex 09: The consent letter of the farming organization, and beneficiaries name list....60
Annex 10: The List of Beneficiaries....61
.Annex 11: Asset clearance letter of ID....65

1.	Proposed Tender Date	:	
2.	Proposed Work Commencement Date	:	
3.	Contract Value	:	

01). Introduction

The Irrigation Department (ID) in Sri Lanka plays a key role in promoting sustainable agriculture and safeguarding farmers' interests through irrigation management, paddy land regulation, agrarian reforms, and support services like credit and extension. Under the Integrated Rurban Development and Climate Resilience Project (IRDCRP), Subcomponent 2.2 focuses on improving irrigation systems. In the Hambanthota District, the Irrigation Department (ID) plans Rehabilitation of Distribution Canal System under the Irrigation and Water Resources Management Program of track 01, 02, & 03 in Left Bank Main Canal (LBMC) in Lunugamwehera Scheme, Thisamaharama Division, Hambanthota Range. ID will handle project design, implementation, and quality control, while the PMU oversees supervision, monitoring, evaluation, and payments. Once completed, ID will manage operations and maintenance, with active participation from the farming community and stakeholders such as local government officials, Department of Wildlife Conservation, and community-based organizations (CBO) through mechanisms like the Social Audit Committee (SAC) and Grievance Redress Mechanism (GRM).

The primary objective of restoring this canal network is to improve water management and boost overall agricultural productivity. During the site visit, the safeguard team observed heavy water loss caused by seepage and leaks. Once the rehabilitation of DCs under LBMC is completed, the Irrigation Department (ID) expects to save enough water to cultivate an additional 2,500 acres while fully meeting the water requirements of existing paddy fields.

Map 1: Project Area – DC 03 & SDC 3Rehabilitation Sites



Source: Google Earth

Each track consists of several distribution canals (DCs) and sub-division canals (SDCs). This sub-project focuses on the rehabilitation of DC 03 and SDC 3 under Track 03 of the Left Bank Main Canal (LBMC).

Table 1: Subproject division of DC 3

No	Track no	DC no	Length
01	03	03	0+058 TO 0+660
02	T03	SDC - 03	0+007 TO 0+650

Table 2: Subproject Location

No	Name of Scheme	Section	GND	Divisional Secretariat	GPS coordinate
01	DC 03 of Track 03, LBMC of Lunugamwehera Scheme,	0+058 TO 0+660	JoolPallama 43	Lunugamwehera	6.32502, 81.32736
02	SDC 3 of Track 03, LBMC of Lunugamwehera Scheme,	0+007 TO 0+650	JoolPallama 43	Lunugamwehera	6.320558, 81.326925

02). Socio economic demographic background

Both proposed canals; DC 03 (from 0+150 to 0+810) and SDC 3 (from 0+007 to 0+650) run through the Joolpallama Grama Niladhari (GN) Division, located within the Tissamaharama Divisional Secretariat (DS) Division of the Hambantota District.

The following tables outline the demographic profile of the Joolpallama GN Division.

***Table 3:** The gender distribution*

DS division	Name of GND	GND Code	Male	%	Female	%	Total
Thissamaharama	Joolpallama	43	1855	49.6	1882	50.4	3737

Source: Department of census & statistics, 2024

***Table 4:** Age group distribution*

Age Group	0 - 14	%	15 - 59	%	60 - 64	%	65 and above	%	Total
Joolpallama	948	25.4	2235	59.8	179	4.8	375	10.0	3737

Source: Department of Census & Statistics, 2024

***Table 5:** Ethnic distribution*

GND Name	GND Code	Sinhalese	%	Sri Lanka Tamil	%	Other	%	Total
Joolpallama	43	3700	99.0	34	0.9	3	0.1	3737

Source: Department of Census & Statistics, 2024

***Table 6:** Religious distribution*

GND Name	Buddhist	%	Hindu	%	Other Christian	%	Other	%	Total
Joolpallama	3689	98.7	29	0.8	11	0.3	8	0.2	3737

Source: Department of Census & Statistics, 2024

While the majority of the population is Sinhala Buddhist, the area is also home to Tamil Hindu and other ethnic communities. Local livelihoods depend primarily on paddy farming, coconut banana cultivation, chena cultivation, and animal husbandry.

03). Project cognizance:

Following table 07 illustrates project identification information with respect to the proposed project.

Table 7: Project details

Project title:	Rehabilitation of DC 03 & SDC 03 of Track 03 LBMC of Lunugamwehera Scheme
Agency of Employer	Integrated Rurban Development and Climate Resilience Project
Duration	Three years
Estimated total cost	
DC 03 (From 0+058 TO 0+660)	Rs 18,989,740.00
SDC 03 (From 0+007 TO 0+650)	Rs 18,563,760.00
Project Implementation Agency	Irrigation Department
Design and Supervision	Irrigation Department, Lunugamwehera
Contact person	Project Director IRDCRP

04). Intervention activities:

Table 8: Project interventions

Name of the Sub Project	Description
Rehabilitation of DC 03 & SDC 03 of Track 03 LBMC of Lunugamwehera Scheme	1. Converting earthen canals into concrete-lined canals

05). Existing issues of Farming Community.

The absence of concrete-lined canals results in significant water loss from leakage and seepage. This infrastructure deficit leads to inefficient irrigation practices and inequitable water distribution. Consequently, farmers face reduced cultivation areas, lower crop yields, and frequent user conflicts, ultimately undermining regional agricultural productivity and local livelihoods.

06). Impact area:

Site Description, Preventing Crop Damages and Traffic Safety Management

The site is accessible via B464 and left bank main canal (LBMC) road.



Figure 01: The site access

To minimize disruption, major construction activities are scheduled for the off-season. Under standard water management practices, sufficient water will be provided for initial land preparation and mudwork, followed by a rotational supply schedule of four consecutive days of delivery and three days of shutoff.

To safeguard farming operations, the contractor must strictly adhere to this rotation and align construction activities accordingly. During the joint site inspection, Irrigation Department (ID) officials confirmed that relevant enforcement clauses will be incorporated into the contract documents. If necessary, the contractor must also implement temporary water bypasses to prevent any agricultural disruption.

Near the canal's starting point, two residential houses are situated downstream of the LBMC road. Because these houses are accessed directly via the LBMC road rather than the DC 03 service road, no significant disruptions to these households are anticipated. However, local farmers frequently use the DC 03 service road to reach surrounding paddy fields and transport harvests.

To ensure safety and minimize traffic disruption, the contractor must maintain uninterrupted pedestrian and vehicular access, manage material stockpiles responsibly, display clear warning signage, and demarcate storage locations. Additionally, exposed rebar must be secured with hard barricades, and all formwork stripping or backfilling must be completed by the end of each workday.

In the vicinity of the SDC 03 starting point, there is a Buddhist place of worship. The contractor must avoid blocking access to this site with parked vehicles or stockpiled construction materials. Similarly, a community hall owned by the Eksath Farmers' Organization is located near the SDC 03 service road. Due to the localized nature of the construction works, no significant impacts on either facility are anticipated.

In accordance with feedback from public consultations, the area is occasionally visited by wild elephants. To ensure workforce safety, the contractor must strictly adhere to the guidelines stipulated in the EMP, such as avoiding night-time work, providing wildlife awareness training, establishing emergency communication protocols, and properly managing food waste to avoid attracting wildlife.

Given the scope and nature of the proposed works, no major impact on crop yields is expected, even if minor construction extends into the active cultivation season. Table 8 outlines the extent of paddy lands served by these canals and the associated local livelihoods.



Starting Point of DC 03 and Surrounding Environment



Existing Concrete-Lined Canal Section



Unlined Canal Section Proposed for Concrete Lining



Three counting process



Unlined Canal Section Proposed for Concrete Lining



Paddy Fields and Coconuts Plantations



Severely eroded banks along an earthen canal section.



A Buddhist worship place near to the starting point of DSC 3



The community hall of the FO adjacent to the SDC 3



Unlined Canal Section Proposed for Concrete Lining at the SDC 3



Existing Concrete-Lined Canal Section of SDC 3



Severely eroded banks along an earthen canal section of SDC 3.

Figure 02: Surrounding environment of the project site

Table 8: The extent of paddy areas belongs to the tank.

Name of the Sub Project	Cultivation	Season	Existing Cultivation			After Rehabilitation		
			Extent (ac)	Extent Harvest	No. of farmers	Extent (ac)	Extent Harvest	No. of farmers
Rehabilitation of DC 03 & SDC 3 of Track 03 LBMC of Lunugamwehera Scheme,	Paddy	Maha	316	840 (MT)	128	380	1008 (MT)	153
		Yala	316	750 (MT)	105	380	900 (MT)	126
	Other Field Crops	Maha	113	290 (MT)	69	135	348 (MT)	83
		Yala	143	370 (MT)	69	170	444 (MT)	83

17). Land ownership status of the project area.

The canal runs parallel to the service road. The canal length and its reservation fall entirely under the ownership of the ID; therefore, no land acquisition is required, and formal clearance from the ID is sufficient for project execution. Consultations and a joint field inspection with the ID and the Farmer Organization (FO) confirmed that surrounding lands are occupied solely by Land Development Ordinance (LDO) permit holders, with no encroachers identified within the project site.

08). Consultations:

Project planning and the social screening to examine the feasibility and importance of the proposed project, the Social Development and Environmental Section of IRDCRP had consultations with the relevant officials and community leaders of the farming organization. The importance of the project, the nature of the IRDCRP, the proposed project intervention activities, compliance with the Environmental and Social Framework (ESF), and the Social Audit Committee (SAC) and Grievance Redress Mechanism (GRM) procedures were discussed during the consultation. Further information on this is attached (Annex -1).

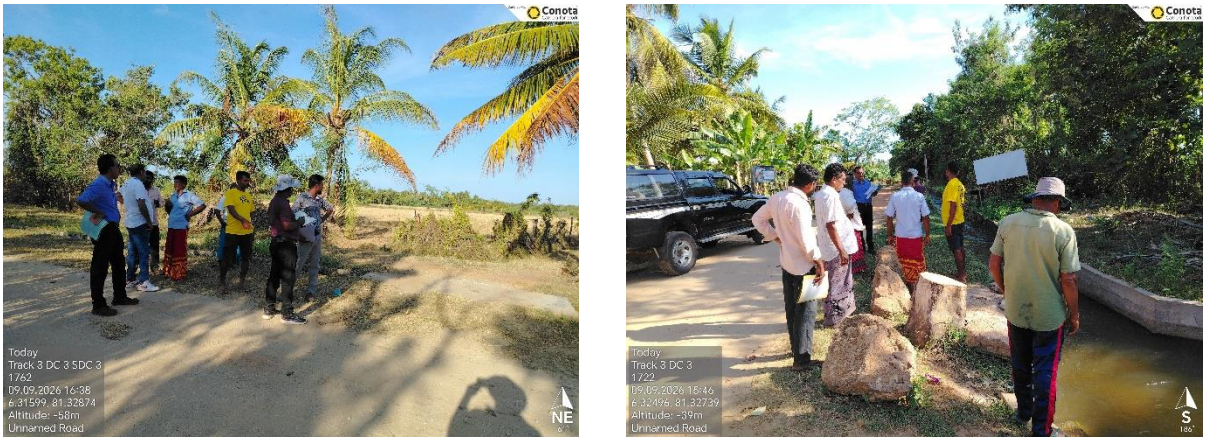

Figure 03: Public consultations during the site inspection of DC 3 & SDC 3

09). Social Screening

The social screening checklist was completed to identify potential impacts of the project (Annex 1). The key findings are summarized below:

i. Land-Related Impacts

- **Construction Activities:** Physical construction work and rehabilitation of existing facilities will take place, and measures to mitigate social impacts owing to such physical construction and rehabilitation are included in the SMP (Annex-02).

- **Land Acquisition:** No land acquisition or house demolition is required due to the construction site belonging to the ID. The land is free from encumbrances and it is under the implementing agency's control.

- **Settlements Nearby**: A two residential housing units are located near the starting point of DC 3. However, because these houses are accessed via LBMC road rather than the DC 03 service road, no significant adverse impacts on nearby private structures or properties are anticipated.

- **Access to Facilities:** The proposed construction activities along the DC 03 service road present several temporary access and safety challenges due to the shared usage of the access road by construction crews, local farmers, and commuters.

To address potential disruptions to agricultural activities, it is recognized that local farmers frequently rely on the service road to transport seasonal harvests and agricultural supplies. Heavy machinery movement, equipment parking, and active trenching could block this critical access route. To resolve this, the contractor must maintain uninterrupted road access throughout the construction period and assign dedicated traffic controllers to coordinate the safe movement of heavy equipment alongside local vehicles and pedestrians. Whenever feasible, necessary actions shall be taken to divert traffic to alternative routes. Clear warning signage and informational boards must be placed at starting points and key access points, detailing the nature of the work, expected project duration, and alternative travel paths.

Regarding safety hazards from shared road use, the simultaneous transit of machinery, pedestrians, and agricultural traffic creates a high risk of collisions and injuries. To mitigate these risks, the contractor is required to install proper warning signage and clear directional markers ahead of active work zones. Additionally, rigid hard barricading must be erected around high-risk areas, particularly near open excavations and exposed reinforced steel bars.

In terms of material management and roadway obstruction, random or improper stockpiling of construction materials and excavated soil along the service road reduces roadway capacity and risks obstructing secondary access paths used by nearby residents. To prevent this, material stockpiling must be strictly restricted to designated, clearly demarcated storage zones located off the main access path, and material placement near residential access routes or active driveways must be prohibited.

Finally, to address overnight hazards posed by ongoing work, incomplete structural components, surplus formwork, or open trenches left unattended after hours present severe risks to evening and early morning commuters. The contractor must enforce mandatory daily site cleanup routines, ensuring that all formwork stripping, trench backfilling, or temporary trench covering is fully completed by the end of each workday.

ii. Dam and Irrigation-Related Impacts

- N/A

iii. Livelihood Impacts: The proposed construction schedule and water distribution plan along the canal system present temporary livelihood and agricultural challenges for local farming communities.

To minimize risks to agricultural yield, local farming relies heavily on a predictable water supply during cultivation. Unexpected water cuts, extended shutoffs beyond three days, or delays during initial land preparation could disrupt planting cycles and damage crops. To prevent this, major construction work will be scheduled during the off-season, and standard water management practices will ensure adequate water for initial land preparation and mudwork. Additionally, the

contractor must follow the agreed rotational schedule (four days of water supply followed by three days of shutoff) and plan their construction activities around these supply periods.

To ensure strict compliance and protect farming operations, Irrigation Department (ID) officials will include binding clauses in the construction contract. If construction physically obstructs the canal, the contractor must set up temporary bypass channels or pipes to keep water flowing and ensure local farming remains uninterrupted.

iv. Labour Related Impacts

- Priority will be given to local hiring, especially FO members. External workers may also be brought in and managed through the Code of Conduct and SMP guidelines. Labour camps will be erected with appropriate mitigation measures. Conduct awareness programs for the labour force on hygiene and the dangers of STDs/OHS.

v. Gender and Social Issues

- Gender-related awareness programs are planned. Also, it will ensure that no gender-based violence (GBV) issues are occurred during implementation of the project.

vi. Community Contribution and Engagement

- Farmer Organizations (FOs) and CBOs will be mobilized for grievance redress mechanisms and social audits committee (SAC) including CMC process. Beneficiaries will contribute to certain collective activities and monitoring processes. The counterpart contribution will be evaluated and documented after project completion.

vii. Minority and Indigenous Impacts

- The project does not affect ethnic minority groups or indigenous populations.

viii. Labour Safety & Site Protocols

Because the project area is frequently traversed by wild elephants and venomous snakes, specialized health and safety protocols must be strictly enforced throughout the construction period. Daily operations will begin with mandatory morning safety toolbox talks dedicated to wildlife awareness, educating the workforce on elephant behavior, snake habits, and immediate site-specific hazards. All personnel involved in clearing brush, handling vegetation, or moving raw construction materials are required to wear high-ankle safety boots (or protective snake gaiters) alongside heavy-duty gloves.

To mitigate risks associated with wild elephants, construction activities will be strictly limited to daylight hours, avoiding the dawn and dusk periods when elephant movements peak. Site camps and work zones must maintain strict waste management practices, requiring all food scraps and organic waste to be stored in secure, airtight containers and removed daily so as not to attract

wildlife. Furthermore, the contractor must establish direct communication channels with the local DWC office, and workers must be instructed never to approach, provoke, or block the path of an elephant.

Emergency medical readiness will be maintained at all times across all work fronts. Site supervisors must be fully trained in standardized first-aid procedures for snakebites, prioritizing strict patient immobilization while strictly prohibiting hazardous traditional practices such as cutting, suctioning, etc. Fully stocked first-aid kits equipped with pressure immobilization bandages will remain accessible on site. Finally, a dedicated emergency transport vehicle must remain on standby during all working hours to ensure immediate evacuation to the nearest regional medical facility.

10). Screening decision on impact categorization:

Once reviewing the aforementioned key findings, it is determined that the project can be categorized as a low-impact/no-impact safeguard category, and further explanation is included in Annex 01.

11). Recommendations:

Once reviewing the above screening, it can be recommended to implement the following mitigation measures that need to be fulfilled before commencing construction of the project for addressing possible social impacts.

i. Social Management Plan (SMP).

In adhering to WB procedures, the SDS-IRDCRP committed to making a Social Management Plan to mitigate social-related possible impacts during the implementation of the sub-project (Annex 02). This SMP shall be included in the bidding documents as a separate plan (as a part of EMP).

ii. Individual Codes of Conduct for the contractor:

Individual Codes of Conduct for the contractor have been made and included as attachment in the SMP in order to sign an agreement with the contractor to ensure implementing environmental, social, health, and safety (ESHS), occupational health and safety (OHS) standards, sexual exploitation and abuse (SEA), sexual harassment (SH), and preventing gender-based violence (GBV). The contractor shall adhere to reporting through the GRM or to his manager any suspected or actual GBV by a fellow worker, whether employed by his company or not, or any breaches of this Code of Conduct (Annex 03).

iii. Grievance Redress Mechanism (GRM

The SDS-IRDCRP has planned to establish a three-tier Grievance Redress Mechanism (GRM) for the aforesaid sub project. Accordingly, a site-level Grievance Redress Committee (GRC) will be formed to address possible social issues (see the annex 04).

iv. Conducting Safeguard Training:

The SDS and ES (IRDCRP) committed to conducting relevant safeguard training to enhance the knowledge of the technical staff members in order to ensure the World Bank's social safeguard compliance when commencing construction work on the proposed sub-projects.

12). Safeguard Implementation and Monitoring.

Site-level GRC will be established to reduce the incidence of extensive and time-consuming issues involving minor issues. The Safeguard Officer (SO)/Project Manager (PM)/Site Supervisor of the contractor assigned to the project will be responsible for handling the possible grievance and social issues at the field level. EMP will be included in the bidding documents, and there will be a budget allocated in the contract for EMP implementation. Representatives of ID should monitor safeguard issues proactively at the construction site with communicating PMU-IRDCRP. As well, the Social Audit Committee (SAC) will be formed to help monitor the quality of civil works, monitor impacts to the community, and support the operation of the GRM. The Social Development Officer of IRDCRP will overall facilitate the follow-up of site-level social safeguard functions, and under the facilitation of administration, the IRDCRP Senior Social Development Specialist is responsible for monitoring the social safeguard implementation process.

13). Report preparation:

Name	Designation	Date	Signature
JMAS Bandara	Consultant for Social Safeguard Management	October 19, 2026	

Annex 01: Social Screening Checklist.

Social Screening Checklist for Potential Sub Projects-IRDCRP

Social Development Section

Ministry of Agriculture, Livestock, Lands and Irrigation

1. Name of Sub-Project: Rehabilitation of DC 03 of Track 03, LBMC of Lunugamwehera Scheme
2. District: Hambanthota
3. Divisional Secretariat: Thissamaharama
4. Name of the cascade: N/A
5. Relevant Implementing Agency: Irrigation Department
6. GND: JoolPallama (43)
7. Name of the Farming Organization: Lunugamwehera LBMC Track 03, DC 03 Eksath Farmer's Organization
8. Agrarian Service Center (ASC)/Divisional Irrigation Office: Irrigation Department - Lunugamwehera
9. GPS Coordination:

No	Name of Scheme	Section	GND	Divisional Secretariat	GPS coordinate
01	DC 03 of Track 03, LBMC of Lunugamwehera Scheme,	0+058 TO 0+660	JoolPallama 43	Lunugamwehera	6.32502, 81.32736
02	SDC 3 of Track 03, LBMC of Lunugamwehera Scheme,	0+007 TO 0+650	JoolPallama 43	Lunugamwehera	6.320558, 81.326925

10. Size/Scale: NCB
11. Description of Project Surroundings (Land Use): The surrounding area consists of paddy fields, coconut plantations, a few scattered residential units along the LBMC access road.
12. Number of beneficiaries:

Name of the Sub Project	Direct	Indirect	Total
Rehabilitation of DC 03 of Track 03, LBMC of Lunugamwehera Scheme	183	180	363

13. Demographic information of the JoolPallama (43) GN divisions.

The gender distribution

DS division	Name of GND	GND Code	Male	%	Female	%	Total
Thissamaharama	Joolpallama	43	1855	49.6	1882	50.4	3737

Source: Department of census & statistics, 2024

Age group distribution

Age Group	0 - 14	%	15 - 59	%	60 - 64	%	65 and above	%	Total
Joolpallama	948	25.4	2235	59.8	179	4.8	375	10.0	3737

Source: Department of Census & Statistics, 2024

Ethnic distribution

GND Name	GND Code	Sinhalese	%	Sri Lanka Tamil	%	Other	%	Total
Joolpallama	43	3700	99.0	34	0.9	3	0.1	3737

Source: Department of Census & Statistics, 2024

Religious distribution

GND Name	Buddhist	%	Hindu	%	Other Christian	%	Other	%	Total
Joolpallama	3689	98.7	29	0.8	11	0.3	8	0.2	3737

Source: Department of Census & Statistics, 2024

14. What are the main sources of livelihoods in the area? Paddy farming, banana cultivation, chena cultivation, & additional crop cultivations
15. What livelihood opportunities are associated with the existing and enhanced facilities of the sub-project?.

The extent of paddy areas belongs to the tank.

Name of the Sub Project	Cultivation	Season	Existing Cultivation			After Rehabilitation		
			Extent (ac)	Extent Harvest	No. of farmers	Extent (ac)	Extent Harvest	No. of farmers
Rehabilitation of DC 03 & SDC 3 of Track 03 LBMC of Lunugamwehera Scheme,	Paddy	Maha	316	840 (MT)	128	380	1008 (MT)	153
		Yala	316	750 (MT)	105	380	900 (MT)	126
	Other Field Crops	Maha	113	290 (MT)	69	135	348 (MT)	83
		Yala	143	370 (MT)	69	170	444 (MT)	83

16. Are there existing settlements or social sensitive locations near the project area? No. there are 6 number of residential units beyond the immediate influence area.
17. "If yes" fill the following table:
18.

SN	Social Sensitive Locations	Distance from proposed project site (m)	Description
1	Human settlements	Within 50m buffer zone	Not anticipated significant direct or indirect impact since no house from the access service road adjacent to the DC 3
2	School	-	
3	Hospital	-	
4	Temple	-	
5	Church	-	
6	Kovil	-	
7	Public Gathering location (please specify…….)	-	
8	Other	-	

19. **Potential social Impacts from the Sub-Project:**

Social Screening Check List (Potential Impacts from the Sub-Project):

SN	Probable involuntary resettlement impacts	Yes	No	Not Known	Details
Land-Related Impacts					
1	Will the sub project include any physical construction work?	Yes			Concrete lining of the earthen section of the DC 3 & SDC 3. (The mitigations are included in SMP.)
2	Does the intervention include upgrading or rehabilitation of existing physical facilities?	Yes			Do
3	Does the project require land acquisition or land related impacts for development (public or private, temporary or permanent)?		No		
4	Does the project cause house demolition (including operating and non-operating ones) due to development?		No		
5	Is the sub project likely to cause partially or fully damage to, or loss of housing, shops, or other resource use?		No		
6	Is the site chosen for this work free from encumbrances and is in possession of the implementing agency?	Yes			The project area is free from encumbrances and it is fully under the jurisdiction of ID.
7	If any land required for the work is privately owned, will this be purchased or obtained through voluntary donation?				Not applicable
8	If the Land parcel has to be acquired, is the actual plot size and ownership status known?				Not applicable

9	Whether the affected land owners likely to lose more than 10% of their land/structure area because of donation?				Not applicable
10	Will the affected land/structure owners likely to lose less than 10% of their land/structures area?				Not applicable
11	Does the urban local body have its own procedures for land acquisition?				Not applicable
12	Will there be any impacts on cultural, community properties or facilities?		No		
13	Are there existing settlements or social sensitive locations near the project area?	Yes			Two residential units are located within the 50m buffer zone. However, these houses have separate access routes and do not rely on the DC 03 service road. Consequently, no significant impacts on these residences are anticipated due to the canal rehabilitation.
14	Is land for material mobilization or transport for the civil work available within the identified work site / Right of way?	Yes			The contractor must strictly adhere to the guidelines stipulated in the SSR and EMP.
15	Does the proposed improvement disturb the access to residential areas, or public spaces?		No		To avoid / minimize potential access disruptions to surrounding agricultural lands, the contractor must strictly adhere to the access management guidelines stipulated in the SSR and EMP.
16	Does the proposed improvement disturb the access to residential areas, or public spaces?		No		
17	Are there any other development activities linked to the proposed sub project?		No		
Rehabilitation of dam head works and rip rap associated irrigation infrastructure related impacts					
18	Will improvements to tank bund including the head works and rip rap structures require the water level in the reservoir to be artificially drawn down?		No		Construction activities are limited to the canal rehabilitations.

19	Will intervention require temporary suspension of water issuance for irrigation in the canal? (Diminishing water for downstream water uses such as bathing, drinking water supplies, irrigation of home gardens, etc.).		No		Major rehabilitation works are scheduled for the off-season. Additionally, the contractor must align construction with the standard rotational water supply schedule (four consecutive days of water delivery followed by a three-day shutoff). Relevant binding clauses will be incorporated into the contract agreements to enforce compliance. Consequently, no disruptions or changes to the regular irrigation water supply schedule are anticipated.
20	Will there be changes to original design levels of the head works that will result in inundation of new land in the catchment?		No		Construction activities are limited to the canal rehabilitations.
21	Will the rehabilitated scheme serve new areas of paddy under its command?		No		Once the full LBMC rehabilitation project is completed, the Irrigation Department (ID) expects to save enough water to cultivate an additional 2,500 acres while fully meeting the water requirements of existing paddy fields.
22	Are there bathing spots that will be unusable during the construction period?	Yes			Construction at specific canal locations may temporarily disrupt access to certain bathing spots. However, suitable alternative bathing locations are available nearby in the immediate vicinity.
23	Are there drinking water supply sources located in the project are that may be rendered unusable during construction period?		No		Canal water is not using for drinking purposes.
Livelihoods Related Impacts					

24	Are there any non-titled people (Squatters) who are living/ or doing business who may be partially or fully affected because of the civil works?		No		
25	Will there be damage to agricultural lands, standing crops, trees, etc.		No		
26	Are there tourism activities taking place in the project area that will get disturbed by construction activity?		No		
27	Due to Rehabilitation activity, will there be damage to agricultural lands, standing crops and other?		No		
28	Will there be any permanent or temporary loss of income and livelihoods as a result of the civil works (Paddy, fisheries activities etc.)? If so for what period?		No		
29	If there are livelihood impacts, have these people/businesses who may suffer temporary loss of incomes or livelihoods been surveyed and identified for any livelihood assistance?		No		There are no livelihood impacts due to rehabilitation of canals. But IRDCRP is planned to assist with skill development programs for farmers (especially considering female groups) and provide opportunities to hire workers from the local workforce.
30	Will people permanently or temporarily lose access to facilities, services, livelihood or natural resources?		No		Temporary access difficulties during construction will be effectively mitigated through the strict implementation of guidelines stipulated in the SSR and EMP.
31	Are there any vulnerable households affected?		No		
32	Does the project cause unemployment?		No		Construction is scheduled during the dry season to prevent disruptions to ongoing agricultural and livelihood activities. Additionally, the project is anticipated to create local

					employment opportunities during the construction phase.
33	Will there be any other temporary impacts? please describe		No		
Labour Influx Related Impacts					
34	How many workers will be needed for the sub-project, with what skill set, and for what period?				15 approximately
35	Can the project hire workers (skilled and unskilled) from the local workforce?	Yes			Priority for FO members.
36	Will there be workers brought in from outside?	Yes			Labour management will proceed with implementing Code of Conduct.
37	Will a camp be required to house these incoming workers?	Yes			If the contractor cannot hire local labors, camps should be established maintaining a safe distance from residential units & public gathering places.
38	Will the incoming workers be from a similar socio-economic, cultural, religious or demographic background?				The contractor will prioritize hiring local labor whenever available. However, if qualified local workers are not available, external labor may be recruited. To ensure these workers align with local norms and minimize social impacts, all personnel will be required to sign and abide by an Individual Code of Conduct
39	Given the characteristics of the local community, are there any adverse impacts, like OHS-related or community safety issues, that may be anticipated?		No		Mitigation measures have been included in SMP in order to mitigate possible OHS and community safety-related social issues.
Gender Based Violence/Gender related social issues					
40	Undertaken consultations with women's groups?	Yes			Important gender-related awareness programs have planned to be done.

41	Issues related to GBV and GBV-related concerns about the project have arisen in the community engagement discussions?		No		
42	Is the project construction near school route or other pedestrian access that women and girls use for their daily activities?		No		
Counterpart contribution from the beneficiary community					
43	Will the project mobilize the CBOs, FO, host community for GRM/Social Audit Committee/ etc. activities? If yes, are they need training?	Yes			SDS-IRDCRP has planned to conduct several mobilization programs.
44	Will the project expect any counterpart contribution (CC)from the beneficiary households? (If yes, have you planned to calculate particular contribution)	Yes			Beneficiary farmers will actively participate in certain collective activities outside the project scope. Community monitoring will be conducted by the farmers throughout the process. Once the rehabilitation activities are completed, the counterpart contribution (CC) will be evaluated and documented. (Relevant indicators have already been identified in the project monitoring process to measure the CC)
Adverse impacts for Minorities					
45	Whether the project has affected ethnic minority communities and population (If yes, mention)		No		
46	Will there be any permanent or temporary impacts for Indigenous peoples?		No		
47	If yes, fill the specific social screening check list which made for (IP) Waddas community.				Not applicable

19. Screening decision on impact categorization:

Once reviewing the answers above, it is determined that the sub-project will have:

High impacts/ substantial impact	Moderate impacts	Low impacts/No impacts
		Low impacts
Justification: This project does not require land acquisition for development (public or private, temporary or permanent), and there are no heavy damages to private or public property, dam- and irrigation-related impacts, adverse livelihood impacts, gender and social issues, or minority and indigenous impacts due to the construction of the project. But it can raise possible unforeseen adverse impacts during the construction, which can be managed by GRM, SMP/EMP. Therefore, it can be categorized as a Low impact for social safeguards.		

20. The screening was carried out by

JMAS Bandara
(Consultant for Social Safeguard Management -IRDCRP) October 19, 2026

(Name and the designation of the Officer) **(Signature)** **(Date)**

Annex 02: Consultation Note of Social screening

Consultation Note

1. Date: 09.09.2026
2. Venue: DC 03 of Track 03, LBMC of Lunugamwehera Scheme
3. Name of project: Rehabilitation of DC 03 of Track 03, LBMC of Lunugamwehera Scheme, Tissamahara Division, Hambanthota District
4. Details of Participants:

No	Name	Designation/Organization
1	Janaka	Engineering Assistant (Irrigation)- ID
2	L.V.S. Thilak	Chairmen Eksath FO.
3	M.A.C. Udayakumara	Grama Niladari
4	W.B. Thilakarasiri	Member
5	H.P. Ariyarathna	Member
6	K.D.W. Sandamali	Member
7	R.A. Rohana Rangajeewa	Treasury Eksath FO.
8	W.H. Siripala	Member
9	K.S.T. Sarathchandra	Member
14	U. Sunil Maithripala	Consultant for Environmental Safeguards Management
15	J.M.A.S Bandara	Consultant for Social Safeguards Management

Summary of participants

Male	Female	Total
14	01	15

Community feedback and consent	Project Responses / Decision taken (Negotiated)
In response to a request made by the **Eksath Farmer Organization** (DC 03, Track 03, LBMC of the Lunugamwehera Scheme), the **IRDCRP Social and Environmental Team**, alongside representatives from the **Irrigation Department (ID)**, conducted a joint field inspection on **September 9, 2026**. • **Consultation and Discussion:** Community leaders and farmer organization chairmen met to hold detailed discussions while observing the proposed rehabilitation interventions. • **Project Requirements:** Members of both the Farmer Organization and the Irrigation Department outlined the urgent need to rehabilitate DC 03 of Track 03 (LBMC) to restore and secure reliable water supplies for paddy cultivation.	The social and environmental team of IRDCR got comprehensive evidence-based experience regarding the Importance of the proposed canal rehabilitation activities. Hence, the safeguard team decided to make a SMP/EMP, a code of conduct, and a GRM, etc., for the rehabilitation of DC 03 of Track 03, LBMC of Lunugamwehera Scheme as a priority project. Safeguard team of IRDCRP intervention to

Discussions also addressed current challenges stemming from infrastructure wear, alongside the following key considerations: • Managing potential disruptions and inconveniences during the construction period. • Ensuring worker health and safety. • Determining the feasibility of designated land locations for material stockpiling. • Conducting environmental and social screenings to assess the viability of the proposed canal rehabilitation. • Implementing measures to minimize disruptions to ongoing paddy cultivation. • Establishing mitigation protocols for potential social impacts. **Key Outcomes and Agreements** The safeguard team concluded that the rehabilitation work poses no significant adverse environmental or social impacts. They expressed satisfaction with the proposed mitigation measure of scheduling heavy civil works during the dry season to safeguard cultivation seasons and local livelihoods. Additionally, stakeholders agreed to form a **Social Audit Committee (SAC)** and facilitate a **Grievance Redress Mechanism (GRM)** to actively monitor civil works, track potential social issues, and oversee safeguard activities.	facilitate ID to address possible social issues. ID is responsible for ensuring safety matters. The technical staff of the ID coordinates all of the sub-project activities.

Attendance list

ඒකාබද්ධ ග්‍රාමීනගර සංවර්ධන හා දේශගුණ තත්වයන්ට මුහුණ දීමේ ව්‍යාපෘතිය - (IRDCRP) - [illegible]

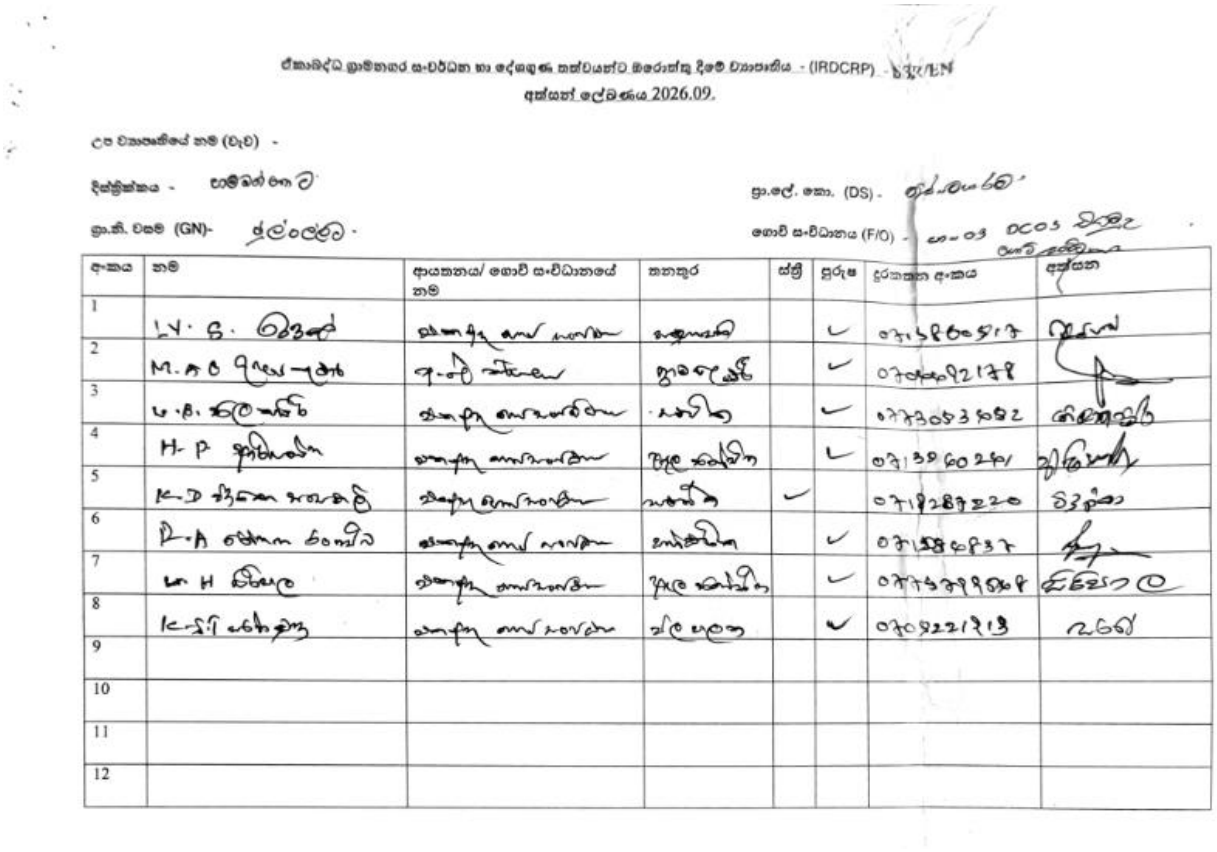

අත්සන් ලේඛණය 2026.09.

උප ව්‍යාපෘතියේ නම (වැව) -

දිස්ත්‍රික්කය - [illegible]

ප්‍රා.ලේ. කො. (DS) - [illegible]

ග්‍රා.නි. වසම (GN)- [illegible]

ගොවි සංවිධානය (F/O) - [illegible]

අංකය	නම	ආයතනය/ ගොවි සංවිධානයේ නම	තනතුර	ස්ත්‍රී	පුරුෂ	දුරකතන අංකය	අත්සන
1	L.Y. S. [illegible]	[illegible]	[illegible]		✓	0715860517	[illegible]
2	M.A.O [illegible]	[illegible]	[illegible]		✓	0704492178	[illegible]
3	U.B. [illegible]	[illegible]	[illegible]		✓	0773053482	[illegible]
4	H.P [illegible]	[illegible]	[illegible]		✓	0713960241	[illegible]
5	K.D [illegible]	[illegible]	[illegible]	✓		0718287220	[illegible]
6	R.A [illegible]	[illegible]	[illegible]		✓	0715846837	[illegible]
7	[illegible] H [illegible]	[illegible]	[illegible]		✓	0775799568	[illegible]
8	K.S.T [illegible]	[illegible]	[illegible]		✓	0709221913	[illegible]
9							
10							
11							
12							

Annex 3: Farmer organization meeting minutes

Date & Time:	September 18, 2026, starting at 2:30 PM.
Location:	At the Chairman's residence.
Proceedings:	Commenced with the welcome speech by the Chairman, followed by discussions regarding the rehabilitation report of DC 03 (Track 03, LBMC of the Lunugamwehera Scheme).
Key Discussions & Decisions	**Rehabilitation of DC 03 (Track 03, LBMC):** ○ Discussions were held regarding the proposed rehabilitation interventions for DC 03 of Track 03. ○ It was noted that due to the lack of proper rehabilitation, current issues include water flow restrictions, canal bank collapse, and difficulties in ensuring proper water distribution for paddy cultivation. ○ It was emphasized that heavy civil construction work should be scheduled during the dry season to minimize disruptions to ongoing cultivation. **Canal Silt Removal Requests:** ○ Members highlighted that several canals; specifically, FC 36, KST 200, and FC 31 are heavily blocked with silt, severely restricting water flow. ○ Requests were made for immediate action to clear and clean these blocked canals. **Institutional & Officer Inputs:** ○ Representatives from the Irrigation Department (ID) and the A.R.C. participated in the field inspections and discussions to evaluate the technical feasibility and ensure proper coordination.
Meeting Conclusion	The meeting concluded at approximately 4:30 PM with a vote of thanks delivered by the Secretary.

Meeting Minutes

2026.9.18 වන දින සඳුදින. යාය 03 DC.03 සංවර්ධන පොට සමාජ සේවා වර්ධන කාර්යාලයේ සභා සෙනෙ පැවැත්වීම ආරම්භ විය. ඒ.ප.හි. 2.30.ට පමණ සභාපතිතුමාගේ ප්‍රාර්ථනාවෙන් සභාව ආරම්භ විය.

පුරවැසියන් සංවිධානයේ ඒ.ප.හි. සභාපති සංවිධානයේ නිලධාරීන් ඇතුව පැමිණි සියලු සාමාජිකයන් විසින් මල්මාලා පූජා කරන ලදී. පසුව සාමාජිකයන් එක්කරගෙන නිලධාරීන් පැමිණි බව සාමාජිකයන්ට දැනුම් දී සභාව මල්මාලා පූජා කරන ලදී. ඉන් පසු සභාවේ සිද්ධිවත් කිරීමට පෙර විනාඩි කිහිපයක් සිහිපත් කිරීමේ අරමුණු රැස් කරන ලදී. අද සංවිධානය ඇරඹූ අයුරුත් ඒ ඇරඹූ මූලික කාලය ඔබට මේ වන විට යම් දුරකින් මිල්ලිම් ලෙල් තිබූ බවත් සඳහන් කරමින් ඒ ඇරඹූ දැඩිමය අද සංවිධානය පත්තා ආවේ විධානයන් මිහිතුන් සංඛ්‍යාව දිනානුත් කරමින් ඒ ඇරඹූ අවසන් කිරීම විය. තවද 2026 වර්ෂය ආරම්භ වියදී එහි ඇරඹූවලි පැවැත්ම හේතු කිහිපයක් ඒ දැක්වීම් කළේ දිනානුත් කරමින් ඒ ඇරඹූ අවසන් කිරීම විය.

ඒ ඉන් පසු පළමුවන විසින් ඉදිරිය වාර්ෂික සභාවට සිද්ධිවත් කරන ලදී. සභා වාර්තාවේ සඳහන් අයුරින් ප්‍රගතිලේඛනය FC 36 සහ ඒ හා KST. සිටින සහභාගී කරගත් ඒ ඇරඹූ අවසන් FC 31 ඇරඹූ. සාමාජික දිවයිනම සහභාගී කිරීම් සඳහා කරන ලදී. අයුරු වාර්තාවේ සඳහන් එකින් ඉදිරිය ඒ ඇරඹූ විෂය විෂයන් සඳහා සාමාජිකයන් විසින් ඒ ඇරඹූ සිද්ධිවත් කිරීම් සඳහා සිදු කරන ලදී.

List of Attendence

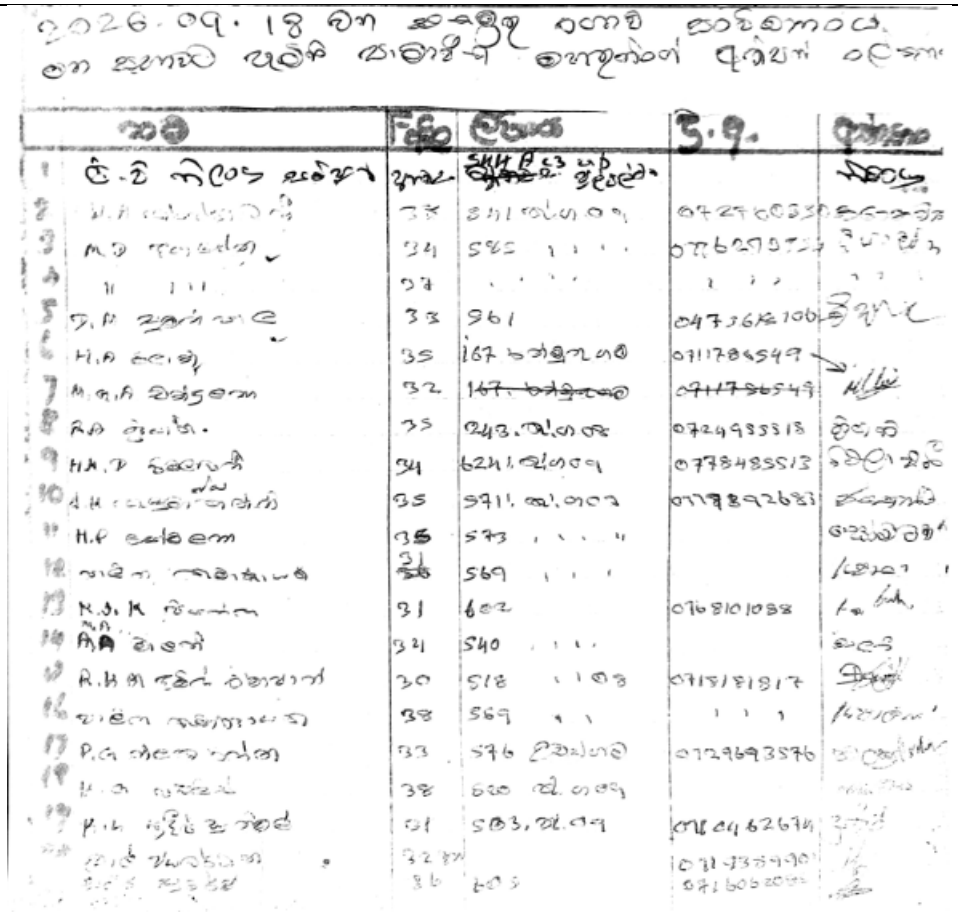

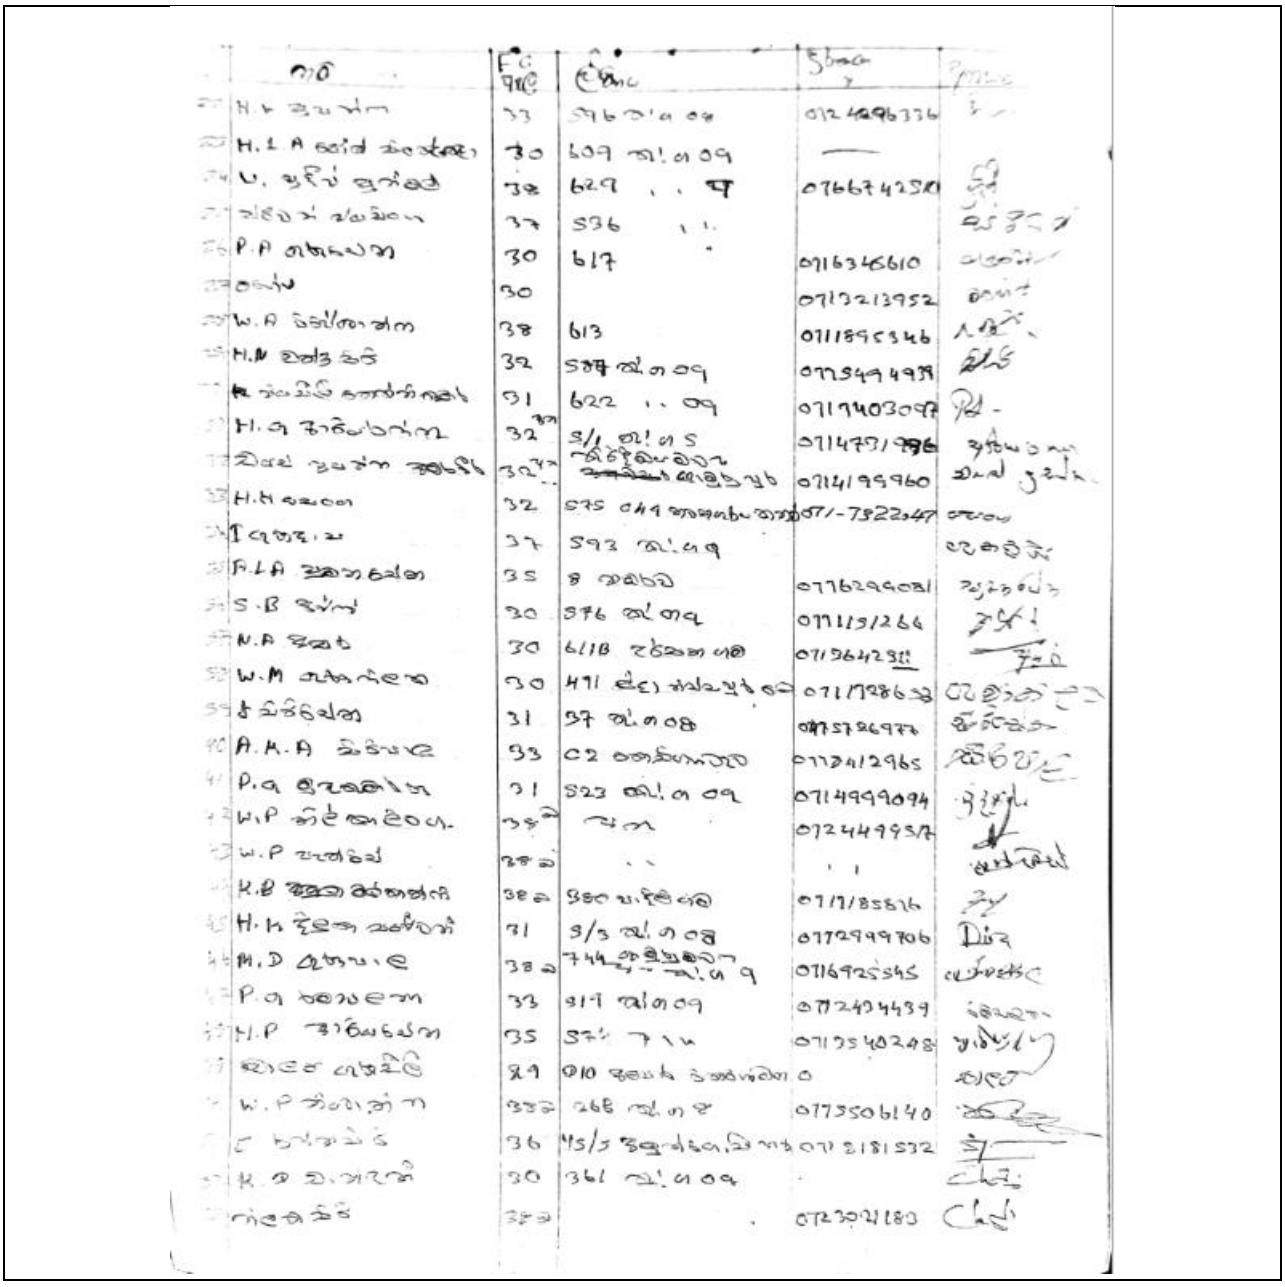

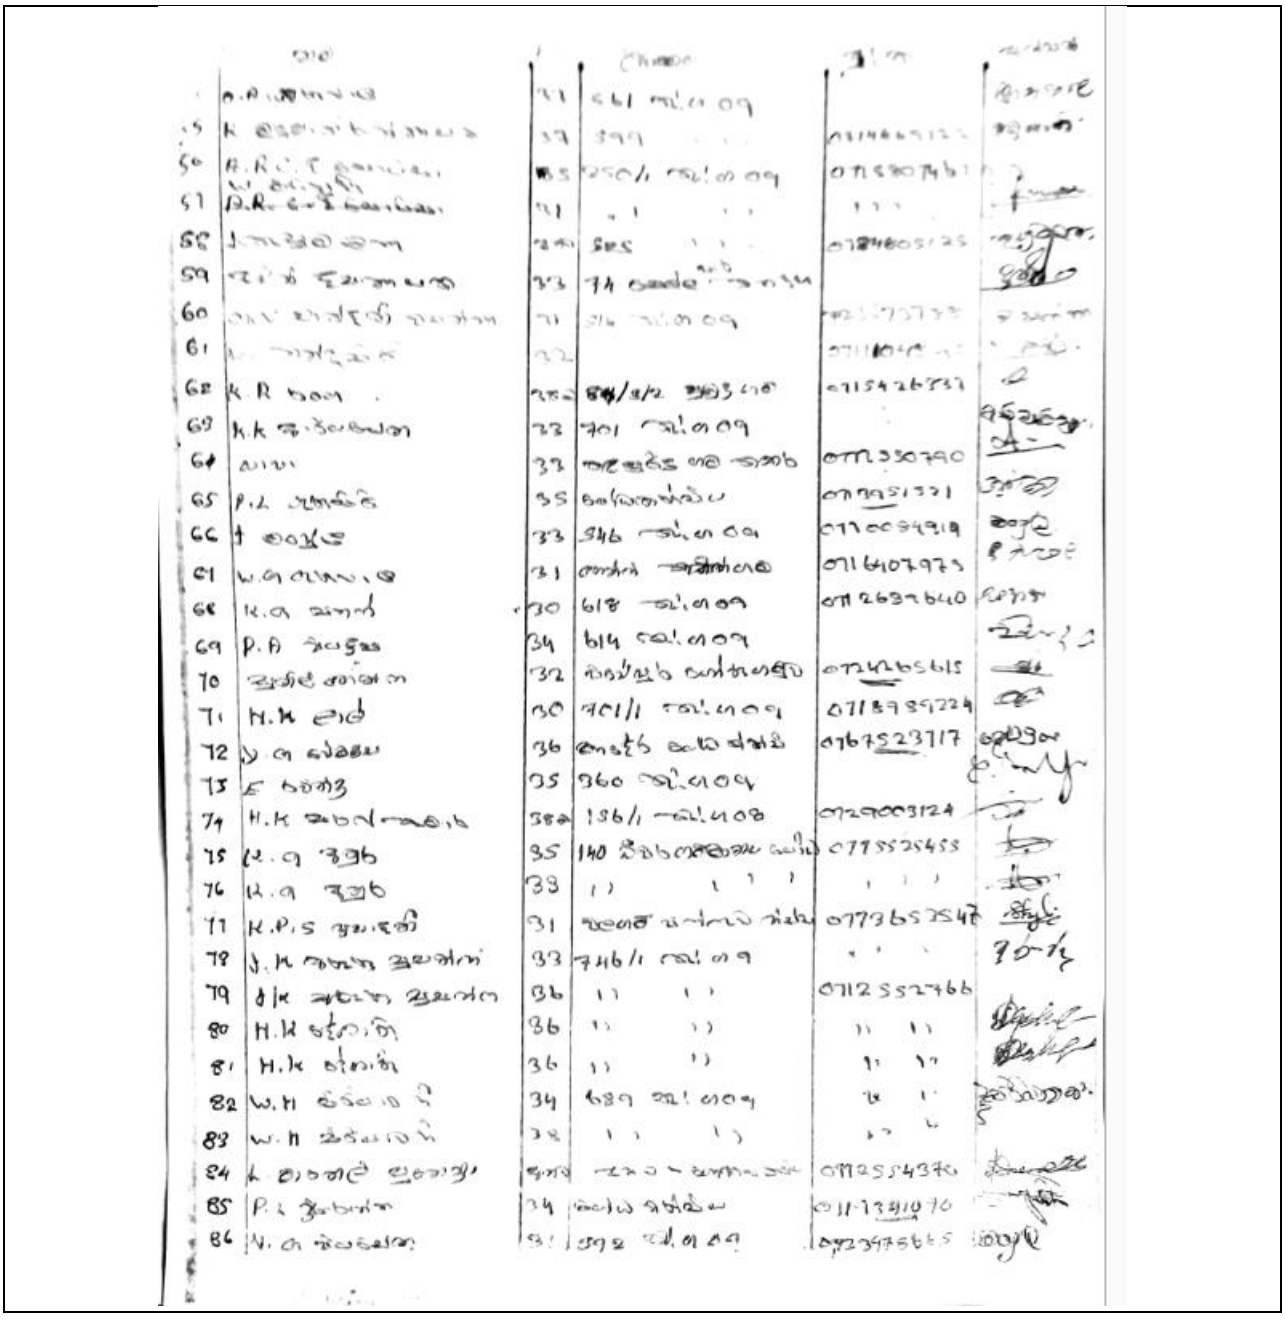

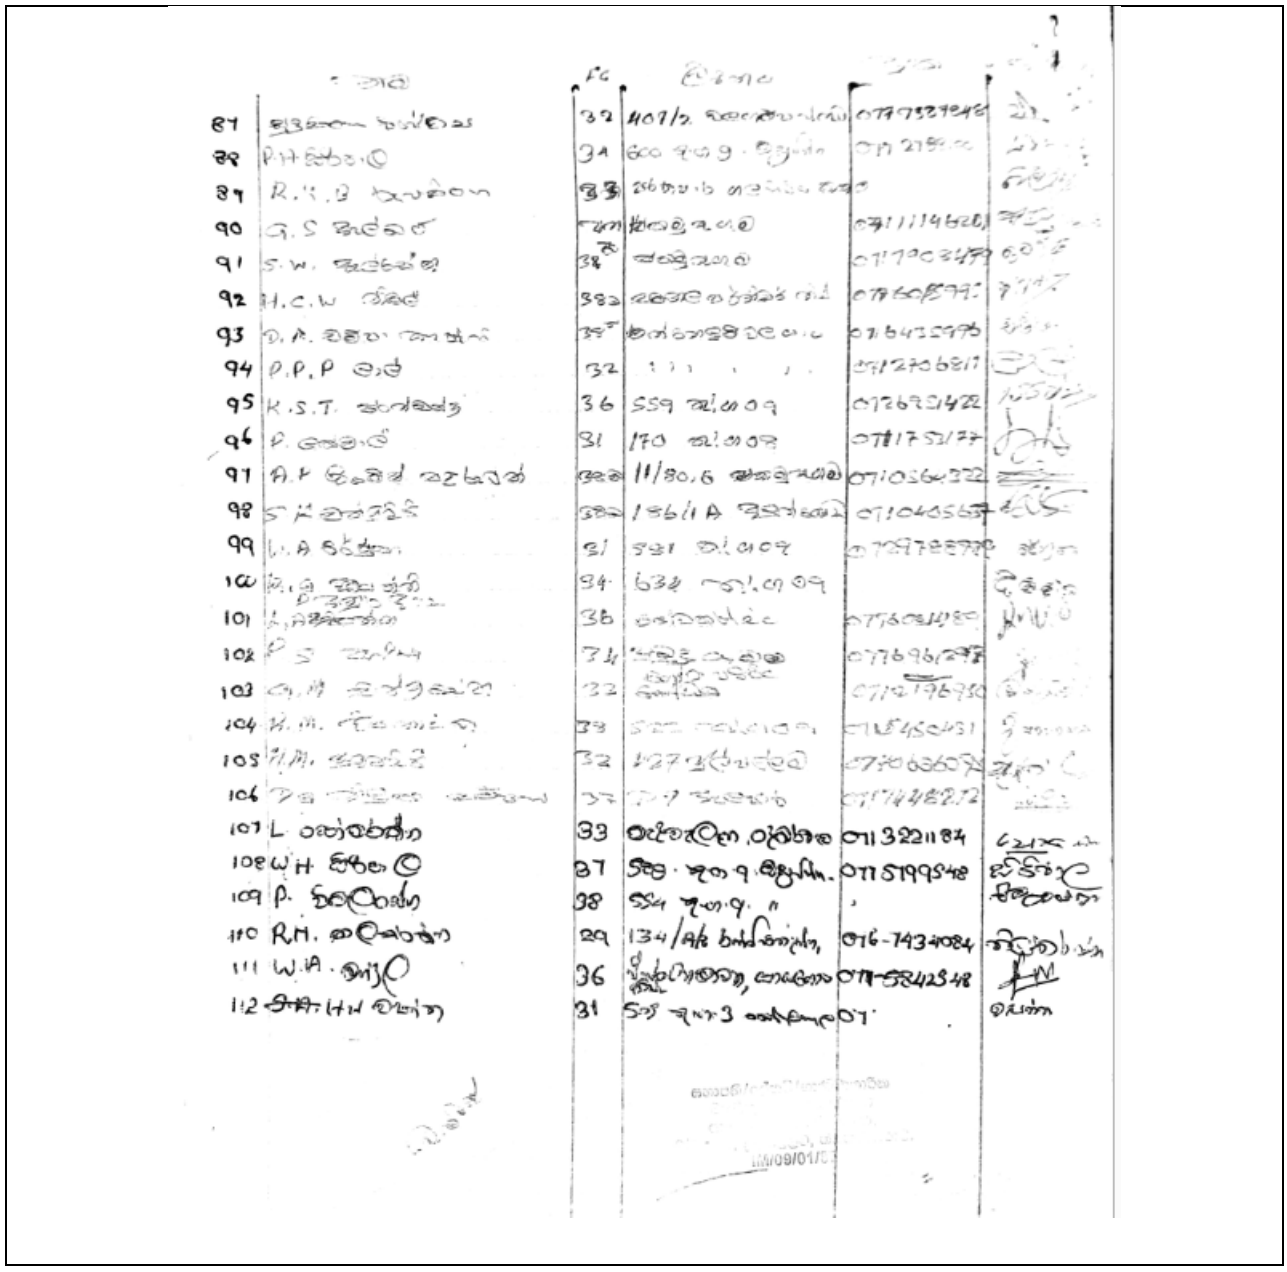

Annex 04: Social Management Plan (SMP)

Distribution Canal (DC 3) Improvement Project, Track Three of Lunugamvehera Left Bank Main Canal (LBMC)

This Social Management Plan shall be read together with the Environmental Management Plan (EMP) provided with the Environmental Screening Report dated 18th September 2026. It is a mandatory document for signing contractors to ensure social compliance with the World Bank's Environmental and Social Framework (ESF). The contractor is responsible for preparing the Social Management Action Plan (SMAP) based on this Plan, which shall be implemented to avoid or mitigate possible adverse social impacts during the construction period. The individual Worker Code of Conduct in Annex 3 shall also be included in the contract agreement.

No	Potential Social Impacts	Mitigation Measures	Implementing Place	Implementing Cost	Responsibility	Time Frame
1	**Institutional Arrangement**					
	General operational oversight and compliance monitoring.	• Employ an Environment, Occupational Health and Safety Officer (EOHS Officer) through the Project Implementation Agency, covering the entire construction phase, responsible for EMP implementation.	Site	Construction cost	Irrigation Department (ID)	Throughout construction phase
		• The EOHS Officer shall develop an EOHS inspection checklist based on the EMP to regularly monitor mitigation measures and ensure contractor compliance	do	do	do	do
2	**Legal and EMP Compliance**					
	Compliance with national laws, project standards, and environmental screening safeguards.	• Coordinate with the Farmer Organization (FO) to avoid construction during peak cultivation times, preventing impacts on farmers' livelihoods.	Site	Construction cost	Irrigation Department (ID)	Throughout construction phase
		• Strictly adhere to the mitigation measures in the EMP provided with the Environmental Screening Report dated 18th September 2026.	do	do	do	do
		• Ensure relevant enforcement clauses and binding EMP compliance conditions are explicitly incorporated into contractor bid documents and civil contracts.	do	do	do	do
3	**Water Management and Agricultural Livelihoods**					

	Unscheduled water cutoffs, extended shutoffs beyond 3 days, or delays in land preparation disrupting crop planting cycles and yields.	• Schedule major civil works exclusively during the agricultural off-season, avoiding active cultivation cycles.	Canal system & agricultural command area	Contractor's cost	Irrigation Department (ID)	Construction period (Off-season / Active rotation)
		• Provide sufficient water for initial land preparation and mudwork per standard water management practices.	Do	Do	Do	Do
		• Strictly align construction tasks with the established rotational schedule (4 days of continuous delivery followed by 3 days of shutoff).	Do	Do	Do	Do
		• Incorporate legally binding compliance clauses in contract documents enforcing contractor adherence to water rotation schedules.	Do	Do	Do	Do
		• Install temporary water bypass channels, diversion pipes, or pumping setups if canal rehabilitation physically obstructs water flow during scheduled issuance days.	Do	Do	Do	Do
		• Conduct early participatory consultations with farmers and FOs on project timelines and water release schedules.	Do	Do	Do	Do
4	**Access Management, Traffic Safety & Sensitive Receptors**					
	Heavy machinery movement, active trenching, equipment parking, and material stockpiling obstructing DC 03 & SDC 03 service roads, LBMC residential routes, and community/religious sites.	• Maintain uninterrupted traffic access along the DC 03 and SDC 03 service roads throughout construction.	DC 03, SDC 03 service roads, LBMC access, and religious/community sites	Contractor's cost	Irrigation Department (ID)	During construction
		• Deploy dedicated traffic controllers/flaggers to coordinate heavy machinery movement with local farm vehicles, harvest transport, and pedestrians.	Do	Do	Do	Do
		• Establish clear directional signage and information boards at starting points and key access routes detailing work nature, expected duration, and alternative bypass paths.	Do	Do	Do	Do

		• Prohibit parking of vehicles, equipment staging, or material stockpiling in the vicinity of the Buddhist place of worship (SDC 03 starting point) and the Eksath Farmers' Organization Community Hall.	Do	Do	Do	Do
		• Restrict material stockpiling strictly to designated, clearly demarcated off-road storage zones; strictly prohibit placement near residential driveways (including houses downstream of LBMC road) or pathways.	Do	Do	Do	Do
		• Restrict speed limits for all project vehicles and equipment along service roads.	Do	Do	Do	Do
5	**Occupational Health, Public Safety & Wildlife Risk Mitigation**					
	Safety risks from heavy machinery, open excavations, exposed rebar, venomous snakes, and wild elephant interactions.	• Alert community members, farmers, and workers using signboards, rigid barricades, fences, and reflective warning tape.	Active work zones, excavation sites, and camp locations	Contract or's cost	Irrigation Departme nt (ID) / PMU	During construction (Prior training & daily operational hours)
		• Comply with health & safety provisions under the Factory Ordinance at the site, vehicle yard, and stockyards.	Do	Do	Do	Do
		• Erect rigid hard barricading around all high-risk zones, deep canal cuts, open excavations, and exposed reinforced steel bars (rebar).	Do	Do	Do	Do
		• Enforce mandatory daily site cleanup routines: complete all formwork stripping, backfilling, or structural trench covering by the end of each workday.	Do	Do	Do	Do
		• Provide appropriate PPE (helmets, high-ankle safety boots/snake guards, heavy gloves) and basic emergency first-aid on site.	Do	Do	Do	Do
		• Conduct daily morning "toolbox talks" covering venomous snake identification and bite prevention; ensure supervisors hold valid basic snakebite management certification and keep emergency transport on standby.	Do	Do	Do	Do

		• Wild Elephant Risk Mitigation: Strictly prohibit night-time construction work in zones visited by wild elephants. Conduct mandatory wildlife safety and awareness training for all workforce personnel. Establish immediate emergency communication protocols with local Wildlife Department officials/Rangers. Implement strict daily food waste and organic garbage management (e.g., secure, wildlife-proof waste bins) to prevent attracting wild animals.	Do	Do	Do	Do
6	**Land-Related Impacts**					
	Temporary or permanent land trespass, encroachment, or property damage.	• Avoid trespass, encroachment, or damage on privately owned lands or residential properties downstream of LBMC road.	Construction area	Contractor's cost	Irrigation Department (ID)	During construction
		• Promptly repair any accidental damage caused to public infrastructure, driveways, or private properties during execution.	Do	Do	Do	Do
7	**Labour Camps, Workforce Welfare, and GBV/SEA/SH Prevention**					
	Labour camps/stockyards near sensitive sites; absence of facilities for women; social conflict, harassment, and GBV/SEA/SH risks.	• Locate labour camps at a safe distance from sensitive locations (temples, schools, community centers, and the SDC 03 place of worship).	Camp / yard / construction area	Contractor's cost	Irrigation Department (ID) / IRDCRP	During construction
		• Ensure camps meet basic living standards: adequate ventilation, safe drinking water, sanitation (1 toilet per 15 persons; separate for men/women), and waste disposal.	Do	Do	Do	Do
		• Prioritize hiring local community and FO members to minimize labour influx.	Do	Do	Do	Do
		• Ensure equal wage parity for female workers and prohibit child labour (<16 years) or hazardous tasks for minors (16–18 years).	Do	Do	Do	Do

		• Require all personnel to sign an individual Worker Code of Conduct prohibiting GBV/SEA/SH prior to starting work.	Do	Do	Do	Do
		• Conduct gender sensitivity awareness sessions and establish sanctions for non-compliance.	Do	Do	Do	Do
		• Maintain an updated inventory of all workers (names, NICs, addresses) shared with PMU, ID, and ASC.	Do	Do	Do	Do
8	**Solid Waste & Construction Debris Management**					
	Accumulation of surplus excavated soil, formwork waste, food waste, and construction debris.	• Strictly follow waste management protocols outlined in the EMP.	Site and stockyards	Contractor's cost	Irrigation Department (ID)	During construction
		• Collect and dispose of construction debris and surplus excavated materials at pre-approved disposal sites.	Do	Do	Do	Do
		• Manage organic food waste daily in sealed bins to prevent pest infestation and wildlife attraction.	Do	Do	Do	Do
9	**Grievance Redress Mechanism (GRM)**					
	Complaints from road users, farmers, residents, and workers regarding construction disruptions or water supply concerns.	• Maintain a three-tier Grievance Redress Mechanism (GRM), including a site-level Grievance Redress Committee (GRC) and local Social Audit Committee (SAC).	Site office and key access points	Contractor's cost	Contractor & Irrigation Department (ID)	Throughout construction period
		• Hold monthly GRC meetings with community/FO representatives from the project-impact area.	Do	Do	Do	Do
		• Maintain a transparent complaints registry and secure complaint box at the site office.	Do	Do	Do	Do
		• Display GRM contact information on project informational boards along service roads.	Do	Do	Do	Do
10	**Contingency Measures & Livelihood Support Assistance (LSA)**					
	Water supply delays, prolonged droughts, unexpected crop impacts, or severe access disruptions.	• Plan major rehabilitation during the dry/off-season, avoiding active Maha and Yala cultivation peaks.	Rehabilitation area & affected farmland	Contractor's cost / IRDCRPas	Irrigation Department (ID) / IRDCRP	During construction phase

				applicable		
		• Adopt alternative engineering solutions (cofferdams, phased construction, bypass channels/pipes) to maintain continuous water delivery.	Do	Do	Do	Do
		• Provide alternative water supplies (water bowsers, pumps, temporary tanks) if agricultural or domestic water sources are unexpectedly interrupted.	Do	Do	Do	Do
		• Carry out rehabilitation section-by-section (staggered construction) to keep remaining canal sections functional.	Do	Do	Do	Do
		• Offer short-term skill development or alternative livelihood support and special assistance packages (e.g., seed/plant distribution) to vulnerable households (women-headed households, elderly farmers) if construction delays impact crop yields.	Do	Do	Do	Do
11	**Reinstatement of Construction Yards, Sites, Roads, and Infrastructure**					
	Unrestored stockyards, damaged service roads, open pits, or scattered formwork materials following completion.	• Complete full site cleanup and infrastructure reinstatement prior to submitting final payment claims.	Construction area, yards, and access routes	Contractor's cost	Irrigation Department (ID) / IRDCRP	At project completion
		• Restore damaged service roads (DC 03/SDC 03), temporary bypass channels, drainage ditches, and material storage yards to original or improved condition.	Do	Do	Do	Do
		• Final payment certification requires formal joint inspection and sign-off by ID, FO representatives, and IRDCRP Environmental/Social specialists.	Do	Do	Do	Do
12	**Post-Rehabilitation Measures**					
	Sustainable operational handover, water system recovery, and post-construction monitoring.	• Train Farmer Organizations (FOs) in sustainable water management and canal maintenance routines.	Rehabilitated canal scheme & farm fields	Contractor / IRDCRP	Irrigation Department (ID) / IRDCRP	Post-rehabilitation period

		• Track agricultural recovery across the command area and provide support packages (seeds/fertilizer) if crop yields are affected during minor season overlap.	Do	Do	Do	Do
		• Conduct post-construction environmental and social audits to verify complete site restoration.	Do	Do	Do	Do
13	**Social Management Action Plan (SMAP) Preparation**					
	Operationalization of site-specific social management measures prior to physical works.	• The contractor shall prepare a site-specific Social Management Action Plan (SMAP) in accordance with this EMP and submit it for formal clearance to the Senior Social Development Specialist of IRDCRP before site mobilization.	Construction area	Contractor's cost	Irrigation Department (ID) / IRDCRP	Prior to and during construction
		• Fully integrate the EMP provisions (dated 18th September 2026) and site-specific traffic, water rotation, and safety management sub-plans into the SMAP.	Do	Do	Do	Do

Annex 05: Individual Code of Conduct (with Sinhala Version)

Individual Code of Conduct

Implementing Environmental, Social, Health and Safety (ESHS), Occupational Health and Safety (OHS) Standards, Sexual Exploitation and Abuse (SEA), Sexual Harassment (SH) and Preventing Gender Based Violence (GBV).

I, _____, acknowledge that adhering to Environmental, Social, Health and Safety (ESHS) standards, following the project's Occupational Health and Safety (OHS) requirements, preventing Gender Based Violence (GBV), Sexual Exploitation and Abuse (SEA), Sexual Harassment (SH) is important. The company considers that failure to follow ESHS and OHS standards, or to partake in activities constituting GBV-be it on the work site, the work site surroundings, at workers' camps, or the surrounding communities-constitute acts of gross misconduct and are therefore grounds for sanctions, penalties or potential termination of employment. Prosecution by the Police of those who commit GBV may be pursued if appropriate.

I agree that while working on the project I will:

1. Consent to Police background check.
2. Attend and actively partake in training courses related to ESHS, OHS, SEA, SH and GBV as requested by my employer.
3. Will wear my personal protective equipment (PPE) at all times when at the work site or engaged in project related activities.
4. Take all practical steps to implement the contractor's environmental and social management plan (C-EMP).
5. Implement the OHS Management Plan.
6. Adhere to a zero-alcohol policy during work activities, and refrain from the use of narcotics or other substances which can impair faculties at all times.
7. Treat women, children (persons under the age of 18), and men with respect regardless of race, color, language, religion, political or other opinion, national, ethnic or social origin, property, disability, birth or other status.
8. Not use language or behaviour towards women, children or men that is inappropriate, harassing, abusive, sexually provocative, demeaning or culturally inappropriate.
9. Not sexually exploit or abuse project beneficiaries and members of the surrounding communities.
10. Not engage in sexual harassment of work personnel and staff —for instance, making unwelcome sexual advances, requests for sexual favors, and other verbal or physical conduct of a sexual nature is prohibited. E.g. looking somebody up and down; kissing, howling or smacking sounds; hanging around somebody; whistling and catcalls; in some instances, giving personal gifts.
11. Not engage in sexual favors —for instance, making promises of favorable treatment (e.g. promotion), threats of unfavorable treatment (e.g. loss of job) or payments in kind or in cash, dependent on sexual acts—or other forms of humiliating, degrading or exploitative behaviour.
12. Not use prostitution in any form at any time.
13. Not participate in sexual contact or activity with children under the age of 18—including grooming, or contact through digital media. Mistaken belief regarding the age of a child is not a defence. Consent from the child is also not a defence or excuse.

14. Unless there is the full consent[1] by all parties involved, I will not have sexual interactions with members of the surrounding communities. This includes relationships involving the withholding or promise of actual provision of benefit (monetary or non-monetary) to community members in exchange for sex (including prostitution). Such sexual activity is considered "non-consensual" within the scope of this Code.
15. Consider reporting through the GRM or to my manager any suspected or actual GBV by a fellow worker, whether employed by my company or not, or any breaches of this Code of Conduct.

With regard to children under the age of 18:

16. Bring to the attention of my manager the presence of any children on the construction site or engaged in hazardous activities.
17. Wherever possible, ensure that another adult is present when working in the proximity of children.
18. Not invite unaccompanied children unrelated to my family into my home, unless they are at immediate risk of injury or in physical danger.
19. Not use any computers, mobile phones, video and digital cameras or any other medium to exploit or harass children or to access child pornography (see also "Use of children's images for work related purposes" below).
20. Refrain from physical punishment or discipline of children.
21. Refrain from hiring children for domestic or other labour below the minimum age of 14 unless national law specifies a higher age, or which places them at significant risk of injury.
22. Comply with all relevant local legislation, including labour laws in relation to child labour and World Bank's safeguard policies on child labour and minimum age.

Use of children's images for work related purposes When photographing or filming a child for work related purposes, I must:

23. Before photographing or filming a child, assess and endeavor to comply with local traditions or restrictions for reproducing personal images.
24. Before photographing or filming a child, obtain informed consent from the child and a parent or guardian of the child. As part of this I must explain how the photograph or film will be used.
25. Ensure photographs, films, videos and DVDs present children in a dignified and respectful manner and not in a vulnerable or submissive manner. Children should be adequately clothed and not in poses that could be seen as sexually suggestive.
26. Ensure images are honest representations of the context and the facts.
27. Ensure file labels do not reveal identifying information about a child when sending images electronically.

With regard to Sexual Harassment in the Construction Site:

I ensure to avoid unwelcome sexual advances, requests for sexual favors, and other verbal or physical conduct of a sexual nature. In this regard I am committed to avoid from:

1. Inappropriate jokes or comments.
2. Unwanted touching or physical advances.

[1] **Consent** is defined as the informed choice underlying an individual's free and voluntary intention, acceptance or agreement to do something. No consent can be found when such acceptance or agreement is obtained using threats, force or other forms of coercion, abduction, fraud, deception, or misrepresentation. In accordance with the United Nations Convention on the Rights of the Child, the World Bank considers that consent cannot be given by children under the age of 18, even if national legislation of the country into which the Code of Conduct is introduced has a lower age. Mistaken belief regarding the age of the child and consent from the child is not a defense.

3. Displaying offensive material.
4. Persistent unwelcome invitations or communications.

Simultaneously avoiding of aforesaid matters, I endeavor to apply SH related following prevention strategies in the construction site:

1. Clear anti-harassment policies.
2. Reporting mechanisms.
3. Regular training and awareness programs.
4. Promoting respect and inclusion.
5. Encouraging open communication.
6. Zero tolerance policy.
7. Immediate action on reports.
8. Thorough and impartial investigations.
9. Support for victims
10. Employee Assistance Programs
11. Protecting the privacy of victims.
12. Role in prevention and response.
13. Understanding rights and responsibilities.
14. Supporting colleagues and reporting incidents.
15. Discuss outcomes and lessons learned.
16. Encouraging diversity and inclusion.
17. Regular feedback and surveys.
18. Adapting to new challenges.

With regard to sexual exploitation and abuse, I shall be committed to avoiding in the construction sites:

1. **Sexual exploitation:** Any actual or attempted abuse of a position of vulnerability for sexual purposes, including profiting monetarily, socially, or politically from the sexual exploitation of another (this includes prostitution, trafficking, and exploitation in the workplace or educational institutions).

2. **Sexual abuse:** actual or threatened physical intrusion of a sexual nature, whether by force or under unequal or coercive conditions (this includes rape, sexual assault, and harassment).

In this effort, I shall be committed to complying with and adhering to the Key Mitigation Principles of the following:

I **Survivor-Centered Approach:** Ensuring safety, confidentiality, and respect for victims.
II **Accountability:** holding perpetrators accountable; organizational responsibility.
III **Prevention:** Proactive measures to prevent SEA.

Sanctions:

I understand that if I breach this Individual Code of Conduct, my employer will take disciplinary action which could include:

I Informal warning.
II Formal warning.
III Additional Training.
IV Loss of up to one week's salary.
V Suspension of employment (without payment of salary), for a minimum period of 1 month up to a maximum of 6 months.
VI Termination of employment.
VII Report to the Police if warranted.

I understand that it is my responsibility to ensure that the environmental, social, health and safety (ESHS), occupational health and safety (OHS) Standards, Sexual Exploitation and abuse (SEA), Sexual Harassment (SH) and Preventing Gender Based Violence (GBV) standards are met. That I will make and adhere to the OHS management plan. Simultaneously, I will adhere to implement GRM in the construction site during the construction period. That I will avoid actions or behaviours that could be construed as GBV. Any such actions will be a breach this Individual Code of Conduct. I do hereby acknowledge that I have read the foregoing Individual Code of Conduct, do agree to comply with the standards contained therein and understand my roles and responsibilities to prevent and respond to SEA, SH, ESHS, OHS, GBV issues. I understand that any action inconsistent with this Individual Code of Conduct or failure to act mandated by this Individual Code of Conduct may result in disciplinary action and may affect my ongoing employment.

Signature: _____

Printed Name: _____

Title: _____

Date: _____

තනි පුද්ගල චයර්ාධමර් සංග්‍රහය

පාරිසරික, සමාජීය, සෞඛ්‍ය සහ ආරක්ෂාව, වෘත්තීය සෞඛ්‍ය සහ ආරක්ෂාව සම්බන්ධ ප්‍රමිතින්, ලිංගික සූරාකෑම සහ අපයෝජන, ලිංගික හිරිහැර සහ ස්ත්‍රී පුරුෂ සමාජභාවය පදනම් වූ ප්‍රචණ්ඩත්වය වැළැක්වීම

.....වන මම පාරිසරික, සමාජමය ,සෞඛ්‍ය ,සහ ආරක්ෂාව (ESHS) සම්බන්ධ **ප්‍රමිතින්** පිළිපැදීම ව්‍යාපෘතියේ ,වෘත්තීයමය ,සෞඛ්‍ය සහ ආරක්ෂාවට (OHS) අදාළ අවශ්‍යතාවයන් අනුගමනය කිරීම ,සහ ස්ත්‍රීපුරුෂ සමාජභාවය මත පදනම් වූ හිංසන ක්‍රියාවන් (GBV) වැළැක්වීම වැදගත් බව පිළිගනිමි .වැඩබිම ,වැඩබිම අවට ,කම්කරු කඳවුරුවල හෝ අවටප්‍රජාවන්හීදී වේවා ESHS සහ OHS ප්‍රමිතීන් අනුගමනය කිරීමට අපොහොසත්වීම හෝ GBV සම්බන්ධ ක්‍රියා කාරකම්වල නිරතවීම දැඩි විෂමාචාර ක්‍රියාවන් බවට සමාගම සළකන හෙයින් ඒ අනුව ඒවා දඬුවම් පැනවීමට ,දණ්ඩනවලට ලක්කිරීමට හෝ ඇතැම්විට සේවය අවසන් කිරීමට වුවද හේතු වේ .GBV ක්‍රියාවන්වල යෙදෙන්නන්ට විරුද්ධව අවශ්‍ය නම් පොලීසිය විසින් නඩු පැවරීමටද කටයුතු කරනු ඇත.

එබැවින් ව්‍යාපෘතියේ සේවයේ නියුක්තව සිටින අතරතුර දී මෙහි සඳහන් ආචාර ධර්ම් පිළිපැදීමට මම එකඟ වෙමි.

1. පොලීසිය විසින් සිදුකරනු ලබන පසුබිම් තොරතුරු සෙවීමට කැමැත්ත පළ කිරීම.
2. මාගේ සේවා යෝජකයාගේ ඉල්ලීම පරිදි ESHS, OHS සහ GBV සම්බන්ධ පුහුණු වැඩසටහන්වලට සහභාගි වීම සහ ඒවාට ක්‍රියාශීලීව සම්බන්ධවීම.
3. වැඩබිමේ සිටින විට දී සහ ව්‍යාපෘතියට සම්බන්ධ කටයුතුවල නිමග්නව සිටිනා සෑම අවස්ථාවකදීම මාගේ පුද්ගලික ආරක්ෂක උපකරණ (PPE) පැළඳගෙන සිටීම.
4. කොන්ත්‍රාත්කරුගේ පාරිසරික සහ සමාජ කළමනාකරණ සැළැස්ම ක්‍රියාත්මක කිරීමට අවශ්‍ය සෑම ප්‍රායෝගික පියවරයන්ම ගැනීම.
5. රැකියාශ්‍රිත සෞඛ්‍ය ආරක්ෂණ කළමනාකරණ සැළැස්ම ක්‍රියාත්මක කිරීම.
6. සේවයේ යෙදී සිටින අවස්ථාවන්හිදී මධ්‍යසාර භාවිතයෙන් තොර ප්‍රතිපත්තිය අනුගමනය කිරීමට සහ මොළයේ ක්‍රියාකාරිත්වයන් නිතරම අඩපණ කරන්නා වූ මත්ද්‍රව්‍ය හෝ වෙනත් අන්තරායකාරී ඖෂධ භාවිතයෙන් වැළකී සිටීම.
7. වගර්ය ,ශරීර වණර්ය ,භාෂාව ,ආගම ,දේශපාලන හෝ වෙනත් මතිමතාන්තර ,ජාතික ,ජනවාගර්ක හෝ සමාජ සම්භවය ,දේපල වත්කම් ,ආබාධිත බව ,උපත හෝ වෙනත් තත්ත්වයන් සළකිල්ලට නොගෙන සියළුම කාන්තාවන්ට ,වයස අවුරුදු18 ට අඩු ළමයින්ට ,සහ පුරුෂයින්ට ගෞරවාන්විත ලෙස සැළකීම.
8. කාන්තාවන්ට ,ළමයින්ට සහ පුරුෂයින්ට නොගැළපෙන හිංසාකාරී ,දෝෂාරෝපණ -බැනවැදීම් ,ලිංගික වශයෙන් ප්‍රකෝපකාරී ,පහත් කොට සළකන්නා වූ, සංස්කෘතික වශයෙන් නුසුදුසු ,ඇමතීම්වලින් හෝ හැසිරීම්වලින් වැළකී සිටීම.
9. ව්‍යාපෘති ප්‍රතිලාභීන් සහ අවට ප්‍රජාවන්හි සාමාජිකයින් ලිංගික සූරාකෑම්වලට හෝ අපයෝජනය කිරීමෙන් වැළකී සිටීම.
10. සේවක පිරිස හා කායර් මණ්ඩලයට ලිංගික හිරිහැර නොකිරීම .උදා -අනාරාධිත ලිංගික වයර්ා සඳහා පෙළඹවීම ලිංගික අනුග්‍රහයන් නොපැතීම සහ ලිංගික ස්වභාවයේ වෙනත් වාචික හෝ ශාරීරික ක්‍රියාවන් සපුරා තහනම් වේ .උදා -කෙනෙකු දෙස පාදාන්තයේ සිට කේශාන්තය දක්වා බැලීම් ;සිපගැනීම් ,උස් හඬින් කථා කිරීම හෝ ශබ්ද කිරීම ;නුසුදුසු ලෙස කෙනෙකු ළඟ ගැවසීම ;සුරුවම් බෑම සහ නොමනා ශබ්ද සහ ලිංගික ස්වභාවය හුවා දැක්වෙන අභිනයන් ;සමහර විටෙක පෞද්ගලික ත්‍යාග ලබා දීම.
11. ලිංගික අනුග්‍රහයන් හි නොයෙළීම - උදා -විශේෂ සැළකිලි පිළිබඳ පොරොන්දු දීම) උදා -සේවයේ උසස් කිරීම වැනි ,(අයහපත් ප්‍රතිවිපාක දක්වන තජර්න) සේවයෙන් පහ කිරීම (හෝ මූල්‍යමය හෝ ද්‍රව්‍යමය ගෙවීම් ,වෙනත් ආකාරයේ නින්දිත ,පහත් හැසිරීම් හෝ පළිගැනීම් සහගත හැසිරීම්.

12. කිසිම විටෙක කිසිම ආකාරයක ගණිකා වෘත්තිය භාවිතා නොකිරීම.
13. ඇඳුම් පැළඳුමින් හෝ ඩිජිටල් මාධ්‍ය හරහා සම්බන්ධවීම් ඇතුළුව වයස අවුරුදු18 ට අඩු ළමයින් සමඟ ලිංගික සම්බන්ධතා හෝ ලිංගික ක්‍රියාවල නොයෙදීම .ළමයකුගේ වයස පිළිබඳව වැරදි නිශ්චය නිදහසට කාරණාවක් නොවේ .දරුවාගේ කැමැත්ත මත එවැන්නක් කිරීමද සමාවට හෝ නිදහසට කරුණක් නොවේ.
14. අදාළ සියළුම පාශ්‍රීවයන්හි පූණර් කැමැත්ත[2] නොමැතිව ,අවට ප්‍රජාවන්හි සාමාජිකයින් සමඟ ලිංගික සබඳතා මා හට පැවැත්විය නොහැකිය .ප්‍රතිලාභ නොගෙවා රඳවා ගැනීම් හෝ සත්‍ය වශයෙන්ම ප්‍රජාවේ සාමාජිකයින්ට වන පොරොන්දු) මූල්‍යමය හෝ මූල්‍යමය නොවන (සත්‍ය ප්‍රතිලාභවල සැපයීම්) මූල්‍යමය හෝ මූල්‍යමය නොවන (රඳවා ගැනීම් හෝ ලබා දෙන බවට පොරොන්දුවීම් ආදියද මෙයට ඇතුළත් වේ.
15. GBV හිංසනයන් සත්‍ය වශයෙන්ම සිදුවීමේදි හෝ එවැන්නක් යැයි සැක කෙරෙන අවස්ථාවලදී මෙන්ම මෙම වයර්ාධමර් පද්ධතිය කිසියම් ලෙසකින් උල්ලංඝනය වන්නා වූ අවස්ථාවලදී එය සිදු කරන පුද්ගලයා මා අයත් සමාගමේ කෙනෙකු වූවත් නොවූවත් දුක්ගැනවිලි කමිටුවට හෝ මාගේ කළමනාකරුට වාතර්ා කිරීමට සැළකිළිමත් වීම.

වයස අවුරුදු 18 ට අඩු ළමයින් සම්බන්ධයෙන්:

16. ඉදිකිරීම් භූමියේ ළමයින් සිටී නම් හෝ අන්තරාදායක ක්‍රියාකාරකම්වල යෙදී සිටී නම් ඒ බව මාගේ කළමනාකරුගේ අවධානයට යොමු කිරීම.
17. ළමයින් ආසන්නයේ වැඩ කරන විටදී වැඩිහිටි පුද්ගලයෙකු ඒ අසල සිටිය යුතු බවට හැකි සෑම විටකම වග බළා ගැනීම.
18. මාගේ ඥාති නොවන කිසිම දරුවෙකු ,හදිසි තත්ත්වයක් මත වහාම ප්‍රතිකාර කිරීමට අවශ්‍ය විටෙක හෝ ශාරීරික වශයෙන් අනතුරකට ලක්වීමේ අවදානමක සිටින අවස්ථාවක හැර මාගේ නිවසට තනිව කැඳවා ගැනීමෙන් වැළකී සිටීම.
19. ළමයින් ලිංගික සූරාකෑමට හෝ හිරිහැරයකට ලක් කිරීමට හෝ ළමා අසැබි දශර්න නැරඹීමට ඉඩ සළසන කිසිදු පරිසණයක් ,ජංගම දුරකථන ,වීඩියෝ සහ ඩිජිටල් කැමරා හෝ වෙනත් මාධ්‍යයක් භාවිතා නොකිරීම)පහත සඳහන්“ සේවා අවශ්‍යතාවයන් සම්බන්ධයෙන් ළමා ඡායාරූප භාවිතා කිරීම ”ද බලන්න
20. ළමයින්ට ශාරීරික දඬුවම් කිරීමෙන් හෝ හික්මවීමෙන් වැළකී සිටීම.
21. නීතියෙන් ඉහළ වයස් සීමාවක් නියම කර නොමැති විටෙක අවම වයස් සීමාව අවුරුදු 14 ට අඩු ළමයින් ගෘහාශ්‍රිත හෝ වෙනත් ශ්‍රම අවශ්‍යතා සඳහා කුලියට යොදා නොගැනීම ;කෙසේ වෙතත් අනතුරක් වීමෙ සැළකිය යුතු අවදානම් තත්ත්වයකට පත් වීමට ඉඩ ඇති අවස්ථාවන්හිදී වයස අවුරුදු 14 ට වැඩි වුවද ළමයින් සේවයේ යොදා ගත නොහැක.
22. ළමා ශ්‍රමයට අදාළ කම්කරු නීති ඇතළු සියළුම දේශීය නීති සහ සහ ළමා ශ්‍රමය සහ අවම වයස පිලිබඳ ලෝක බැංකුවේ ආරක්ෂණ ප්‍රතිපත්තිවලට අනුකූලවීම.

සේවා අවශ්‍යතාවයන් සම්බන්ධයෙන් ළමා ඡායාරූප භාවිතා කිරීම

රැකියා හා සම්බන්ධ අරමුණු සඳහා දරුවෙකු ඡායාරූප ගත කිරීමේදී හෝ රූ ගත කිරීමේදී ,මා විසින්

[2] පුද්ගලයෙකුගේ නිදහස් සහ ස්වේච්ඡා මය අභිප්රා ය ,පිළිගැ නීම ,යමක්කිරීමට එකඟවීම මත පදනම් වූ දැ නුවත් තේරීම කැ මැ ත්ත ලෙසට අර්ථ ගැ න්වී ඇත .එවැනි පිළිගැනීමක් හෝ එකඟතා වයක් ,තර්ජනය කිරීමෙන්ල බලෙන් හෝ අන් ආකා ර වල සංයෝ ජනයන්ගෙන්ල බලෙන් පැ හැ රගෙන යා මෙන්ල වංචා වෙන්ල රැවටීමෙන්හෝ වැ රදි ලෙස නිරූපණය කිරීමෙන් ලබා ගන්නා අවස්ථා වන්හිදී කැ මැ ත්ත නො මැ ති බව සොයා ගත හැ ක .චර්යා ධර්ම පද්ධතිය හඳුන්වා දෙනු ලබන රටෙහි ජා තික නීති සම්පා දනයේ අඩු වයසක් දක්වා නිබුණද ලෝ ක බැංකුව එක්සත් ජා තීන්ගේ සංවිධා නයේ ළමා අයිතිවා සිකම් පිළිබඳ සම්මුතිය අනුව යමින් වයස අවුරුදු18 ට අඩු ළමයින් යනු කැ මැ ත්ත ලබා දිය නො හැ කි අය බවට සලකනු ලබයි .ළමයකුගේ වයස පිළිබඳ වැ රදි විශ්වා සය සහ ළමයා ගේ කැ මැ ත්ත නිදහසට හේතුවක් නොවේ .

23. දරුවෙකු ඡායාරූපගත කිරීමට හෝ රූ ගත කිරීමට පෙර හෝ පෞද්ගලික ඡායාරූප ප්‍රතිනිමර්ාණ කිරිමේදි දේශීය සම්ප්‍රදායන් හා සීමාකරණයන් අධ්‍යයනය කිරීම හා අනුගමනය කිරීමට ගතහැකි සියළු ප්‍රයත්නයන් දැරීම.
24. දරුවෙකු ඡායාරූපගත කිරීමට හෝ රූගත කිරීමට පෙර ,දරුවාගෙන් හා දෙමාපියන්ගෙන් හෝ භාරකරුවෙකුගෙන් ඒ පිළිබඳව දැනුවත් කර නිසි කැමැත්ත ලබා ගැනීම .මේ සම්බන්ධයෙන් ඡායාරූපය හෝ චිත්‍රපටය භාවිතා කරන්නේ කෙසේද යන්න පිළිබඳ තේරුම් කරදීමට වගබලා ගැනීම.
25. ඡායාරූප ,චිත්‍රපට ,වීඩියෝ සහ ඩීවීඩී තැටි තුළින් ළමයින් නිරූපණය කිරීමේදී ළමයින්ගේ අභිමානය සහ ගෞරවය සුරක්ෂා වන පරිදි එය කිරීමට වග බලා ගැනීම .ඔවුන් අවාසි සහගත බලපෑම්වලට ලක් නොකිරීමට සහ යටහත් නොකිරීමට වග බලා ගැනීම .ළමයින් සුදුසු පරිදි ප්‍රමාණවත් ලෙස ඇඳුම් ඇඳිය යුතු අතර ලිංගික කාරණා ඉස්මතු නොවන ලෙස අදාළ ඉරියව්වලින් පෙනී සිටින ලෙසට වග බලා ගැනීම.
26. ළමා නියෝජනය කිරීමේදී ඒවා සන්දහර්ය සහ සත්යවාදී කරුණු සමඟ සංගතතාවයෙන් යුක්ත බවට තහවුරු කිරීම.
27. විද්යුත් තැපැලෙන් ඡායාරූප යවන විට දරුවෙකු පිළිබඳ හඳුනා ගැනීමේ තොරතුරු ගොනු ලේබල මඟින් අනාවරණය නොවන බවට සහතික වීම.

දණ්ඩනයන්

මා මෙම පුද්ගලානුබද්ධ වයර්ාධමර් පද්ධතිය උල්ලංඝනය කළහොත් ,මාගේ සේවා යෝජකයා මට විරුද්ධව විනය ක්රියාමාගර් ගන්නා බවත් ඒවාට පහත දැක්වෙන දණ්ඩනයන් ඇතුළත් විය හැකි බවත් දනිමි.

1. අවිධිමත් අනතුරු ඇඟවීම්
2. විධිමත් අනතුරු ඇඟවීම්
3. අතිරේක පුහුණු කිරීමේ
4. සතියක් දක්වා වැටුප් අහිමිවීම්
5. රැකියාව අත්හිටුවීම) වැටුප් නොගෙවා ,(අවම මාස 1 ක කාලයක සිට උපරිම මාස 6 ක කාලයක් දක්වා
6. රැකියාව අවසන් කිරීම
7. අවශ්ය වුවහොත් පොලීසියට වාතර්ා කිරීම

පාරිසරික ,සමාජමය ,සෞඛ්යමය සහ ආරක්ෂාවට අදාළ ප්රමිතින් සපුරාලීම සහතික කිරීමත්, වෘත්තීයට අදාළ සෞඛ්ය සහ ආරක්ෂක කළමනාකරණ සැලසුම පිළිපැදීමත්, එමෙන්ම ස්ත්රී පුරුෂ සමාජභාවය මත පදනම් වූ හිංසනයන් සේ හැඟවෙන ක්රියාකාරකම්වලින් සහ වයර්ාවන්ගෙන් වැළකී සිටීමත් මගේ වගකීම බව මම තේරුම් ගනිමි .එවැනි ඕනෑම ක්රියාවක් මෙම පුද්ගලානුබද්ධ වයර්ාධමර් පද්ධතිය උල්ලංඝනය කිරීමක් බවට මම අවබෝධ කර ගෙන සිටිමි .ඉහතින් දක්වා ඇති පුද්ගලානුබද්ධ වයර්ාධමර් පද්ධතිය මා විසින් කියවා බැලූ බවත් එහි ඇති ප්රමිතීන්වලට අනුකූලවීමටත් මම එකඟවන බවත් ,ESHS, OHS, GBV ගැටළු ඇති වීම වැළැක්වීමට සහ ඒවාට ප්රතිචාර දැක්වීමට අදාළ මාගේ කායර්භාරයන් සහ වගකීම් මා විසින් පිළිගන්නා බවත් මෙයින් ප්රකාශ කර සිටිමි . මෙම පුද්ගලානුබද්ධ වයර්ාධමර් පද්ධතිය හා නොගැළපෙන ක්රියාවක් සිදුකිරීම හෝ මෙම පුද්ගලානුබද්ධ වයර්ාධමර් පද්ධතියෙන් බලගන්වා ඇති පරිදි ක්රියා කිරීමට අපොහොසත් වීම ,විනයානුකූල පියවර ගැනීමට හේතු වන බවත් ඉන් දැනට මා නියුක්තව සිටින රැකියාවට කිසියම් අහිතකර බලපෑමක් සිදු විය හැකි බවත් මම අවබෝධ කරගෙන සිටිමි.

අත්සන: .....

මුද්රිත නාමය: .....

තත්ත්වය/තරාතිරම: .....

දිනය: .....

Annex 06: composition of the GRCs.

Site level/GN level GRC

Representatives	Nature of the membership
Grama Niladari of the area	Chairman
Representative from the ID	Secretary
Representative of IRDCRP (if available)	Member
Representative of Construction Contractor (PM/Safeguard Officer)	Member
Representative of ID	Member
Representative of FO	Member
Female Representative of DS	Member
Representative of a local social organization (NGO/CBO) or religious leader	Member
Any other essential body as needed	Member

DS level GRC

Representatives	Nature of the membership
Divisional Secretary	Chairman
Representative from the ID	Secretary
Grama Niladari of the area	Member
Representative of Construction Contractor	Member
In charge of ID	Member
Representative of IRDCRP (if available)	Member
Female Representative of DS	Member
Representative of a local social organization (NGO/CBO) or religious leader	Member
Chairmen of Farming Organization.	Member

PMU level GRC

Representatives	Nature of the membership
Additional Secretary of relevant Ministry	Chairman
Representative from the IRDCRP (project Director)	Secretary
Divisional Secretary of relevant area	Member
Senior Social Development Specialist	Member
Representative of ID	Member
Representative of a local social organization (NGO/CBO) or religious leader	Member
Any other essential body as needed	Member

A Grievance Registry and complaint box will be situated at the site office, and a representative of IRDCRP/representative of ID employed on-site will oversee the resolution of potential social issues with the PMU-safeguard team. The Senior Social Development Specialist at PMU will monitor the GRM process in a timely and effective manner. The contractor shall have to adhere to this GRM to mitigate possible social issues due to implementing civil work of the construction.

The SDS of IRDCRP will be responsible for the timely training of the committee members in order to enhance capacity building for the smooth functioning of GRC under the capacity building plan.

Annex 07: Legal Framework and World Bank's ESF Policy and Standards

Within the effect zone, the project does not entail any property acquisition, relocation, or land use changes. Beneficiary farmers' livelihoods can, nevertheless, experience minor effects or disruptions. The project will adhere to the following national laws, regulations, and policies in the event that land purchase, relocation, or impacts are required, and any adverse impacts or discrepancies with the World Bank's Environmental and Social Framework (ESF) will be fixed in line with World Bank guidelines:

National Laws, Regulations, and Policies to prevent adverse impacts

- Land Acquisition Act, 1950
- Land Acquisition Regulations, 2008
- Land Acquisition (payment of compensation) Regulations of 2013
- State Lands (recovery of possession) Act No. 7 of 1979
- Temple and Devalagam (compensation) Ordinance, No. 28 of 1944
- National Involuntary Resettlement Policy, 2001
- National Environmental Act (NEA) No. 47/1980
- Factories Ordinance No. 45 of 1942 (occupational safety & health for factories/construction elements)
- Antiquities Ordinance (No. 9 of 1940)
- Public Health legislation (Public Health Ordinance; Health Services Act); Quarantine & Prevention of Diseases Ordinance; emergency / disaster management regulations.
- Agrarian Development Act No. 46 of 2000 (Section 32)

World Bank's Environmental and Social Standards

The World Bank's Environmental and Social Standards (ESS), part of its Environmental and Social Framework (ESF), set requirements for managing environmental and social risks in projects. For this project, the following plans have been developed to comply with the requirements of ESF:

- Environmental and Social Guideline (ESG)
- Environmental and Social Commitment Plan (ESCP)
- Labor Management Plan (LMP)
- Indigenous Peoples Plan (IPP)
- Stakeholder Engagement Plan (SEP)

Therefore, all Social Safeguards Reports (SSR) and Social Management Plans (SMP) is prepared complying with the requirements details in the above instruments.

Annex 08: Contingency plan

Contingency Plan for Recovery of Possible Livelihood Losses of Farmers During Rehabilitation of Projects

1. Introduction:

The construction and rehabilitation of aforesaid agricultural tanks can temporarily affect the livelihoods of farmers who depend on these resources for cultivation and daily income. This contingency plan outlines strategies and measures to minimize, mitigate, and recover potential livelihood losses experienced by farmers during the construction phase. The plan focuses on protecting vulnerable groups, ensuring timely livelihood restoration, and maintaining food security within the affected community.

2. Objectives of the Plan:

- To ensure that the farmers' livelihoods are not permanently disrupted due to construction activities.
- To provide short-term and long-term livelihood support mechanisms for affected farmers
- To promote community participation in decision-making and implementation of mitigation measures.

3. Potential Livelihood Impacts:

Type of Impact	Description	Affected Group
Loss of cropping season	Construction work may block irrigation water supply, delaying or halting cultivation.	Paddy and vegetable farmers
Temporary loss of access to agricultural land	Machinery, materials, or construction boundaries may restrict access to farmlands.	Landowners and tenant farmers
Reduced income from agriculture	Lack of water and access may reduce harvests, leading to income loss.	Farming households
Employment disruption	Local laborers dependent on agricultural work may lose daily wages.	Agricultural laborers
Disturbance to livestock activities	Movement of cattle or buffalo may be restricted due to site fencing or machinery.	Livestock owners

4. Contingency Measures:

4.1. Pre-Construction Phase:	**Initial Screening Process:** Conduct an Environmental and Social Screening considering socio-economic assessment to identify affected farmers, land tenure status, cropping patterns, and income sources. Making SMP, EMP, EMP in resulting screening process. **Community Consultation:** Engage with Farmers' Organizations (FOs), Grama Niladhari (GN), Irrigation Department (ID) to plan construction timing to avoid cultivation periods.

	Awareness Programs: Inform all stakeholders about construction schedules, access routes, alternative arrangements, the Grievance Redress Mechanism (GRM), and the Stakeholder Advisory Committee (SAC) for irrigation and farming.
4.2. Construction Phase:	**Alternative Irrigation Arrangements:** • Provide temporary water channels, pumps, or pipes to ensure water supply for ongoing cultivation. • Schedule construction during the off-season (Yala or Maha) to minimize cropping losses. • Alternative technical options and site-specific, section-by-section construction scheduling should be adopted to minimize disturbances to farming activities. **Income Support Measures:** • Provide temporary employment opportunities in construction activities (e.g., unskilled labor, transport, cleaning). • Introduce food-for-work programs for affected households. **Livestock Support:** • Provide alternative grazing areas and temporary shelter for livestock. • Arrange safe passage routes for livestock movement around construction zones
4.3. Post-Construction Phase	**Rehabilitation of Agricultural Lands (reinstate):** • Ensure the rehabilitation of DC 03 of track 3, LBMC of Lunugamwehera scheme, before the start of the next cultivation season. • Provide community labor or machinery support for land leveling and field preparation. **Livelihood Recovery Programs:** • Conduct capacity-building and training programs on improved water management, organic farming, and crop diversification. • Promote home gardening, small livestock rearing, or value addition enterprises (e.g., rice milling, dairy products) as supplementary income sources. **Monitoring and Evaluation:** • Establish a joint monitoring committee (FO, GN, ID, and project staff) to review livelihood recovery progress. • Conduct periodic follow-up surveys to ensure income restoration and project sustainability.

5. Institutional Arrangement:

Institution	Role and Responsibility
IRDCRP / Project Implementing Agency	Lead implementation of mitigation and recovery activities; coordinate with relevant government departments.
Department of Irrigation (ID)	Technical advice, farmer registration, and compensation verification.

Grama Niladhari & Farmers' Organization (FO)	Community mobilization, grievance reporting, and local monitoring.
Social & Environmental Safeguard Team	Ensure ESS-2 and ESS-5 and ESS-10 compliance, maintain grievance mechanism, and monitor implementation effectiveness.

6. Grievance Redress Mechanism (GRM)

A dedicated Grievance Redress Committee (GRC) will address complaints related to livelihood losses. The mechanism ensures that:

- Grievances are recorded, verified, and resolved within a reasonable time frame.
- Farmers can raise concerns without fear of retaliation.
- All cases and resolutions are documented and reported to the Project Management Unit (PMU).

7. Budgetary Provisions:

The Provisional Sum (PS) of the bidding document shall include a budgetary allocation for implementing this contingency plan. Furthermore, the contingency plan shall be directly linked with the EMP/SMP/EMP to cover livelihood recovery activities, including:

- Training and capacity building of farmers.
- Monitoring and grievance handling costs.
- Alternative site-specific water provisions (Farming activity), (refer the SMP/EMP)

These budgetary provisions shall discourage compensation (cash payments) for any affected persons. Payment will be made to the contractor based on the measured quantities, and the payment methods are subject to the approval of the responsible engineer in accordance with the safeguard requirements.

8. Summarizing:

This contingency plan ensures that the construction of the project does not result in long-term livelihood losses for farmers. Through proactive planning, transparent alternative actions, and continuous community engagement, affected farmers will be supported to recover their livelihoods sustainably while contributing to the successful implementation of the project.

Annex 09: The consent letter of the farming organization, and beneficiaries name list

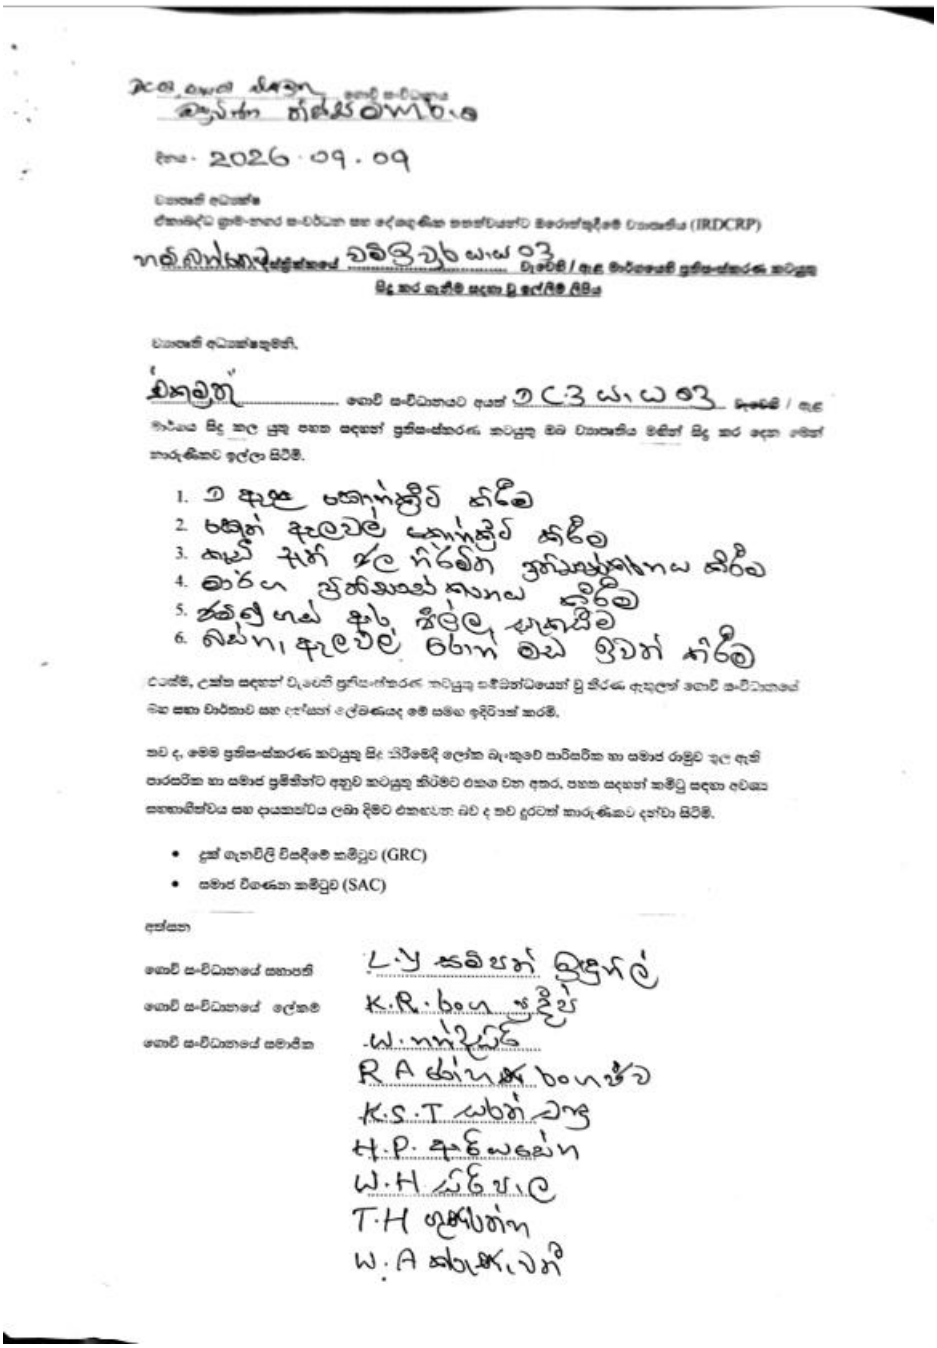

දිනය 2026 · 09 · 09

වාහනේ අධ්‍යක්ෂ

ජාතික්‍රීඩා ප්‍රජා-ආහාර සංවර්ධන සහ දේශගුණික හානිවලින් මිරොන්තුදීමේ ව්‍යාපෘතිය (IRDCRP)

ආර්. ලාභාපුර ප්‍රජාමූලික සංවිධිය වම්බුවුව ග්‍රාම 03 ශාඛාවේ / ඇළ මාර්ගයෙහි පුනරුජ්ජීවන කටයුතු සිදු කර ගැනීම සඳහා වූ ඉල්ලීම් පිළිය

වාහනේ අධ්‍යක්ෂතුමනි,

එකතුව ..... ගොවි සංවිධානයට අයත් 03 ග්‍රාම 03 වැවෙහි / ඇළ මාර්ගය සිදු කල යුතු පහත සඳහන් පුනරුජ්ජීවන කටයුතු මම ව්‍යාපෘතිය මඟින් සිදු කර දෙන මෙන් කාරුණිකව ඉල්ලා සිටිමි.

1. 03 ඇළ පොකුණුවීම් කිරීම
2. පතුල් ඇලවීම් පොකුණුවීම් කිරීම
3. කෑලි ඇති බල සිර්මති පුනර්ජීවනගත කිරීම
4. මාර්ග පුතිසංස්කරණ කාණු කිරීම
5. ජනපද ගම් අතර සීමාවල් ඇතුළත් කිරීම
6. වෙන්ග, ඇලවීම් වගා මඩ ඉවත් කිරීම

ඒ අනුව, උක්ත සඳහන් වැවෙහි පුනරුජ්ජීවන කටයුතු සම්බන්ධයෙන් වූ කිරීම, ඇතුලත් ගොවි සංවිධානයේ මෙම සභා වාර්තාව සහ දන්නෙන් ලේඛණයද මේ සමඟ ඉදිරිපත් කරමි.

තව ද, මෙම පුනරුජ්ජීවන කටයුතු සිදු විමේදී ලෝක බැංකුවේ පාරිසරික හා සමාජ රාමුව තුල ඇති පාරසරික හා සමාජ පුමිතීන්ට අනුව කටයුතු කිරීමට එකඟ වන අතර, පහත සඳහන් කමිටු සඳහා අවශ්‍ය සහභාගිත්වය සහ දායකත්වය ලබා දීමට එකඟවන බව ද තව දුරටත් කාරුණිකව දන්වා සිටිමි.

- දුක් ගැනවිලි විසඳීමේ කමිටුව (GRC)
- සමාජ විගණන කමිටුව (SAC)

අත්සන

ගොවි සංවිධානයේ සභාපති — ඩ.ඩ සමිපන් පුසුන්ල්

ගොවි සංවිධානයේ ලේකම — K.R.බංග පුදීප්

ගොවි සංවිධානයේ සමාජික — ඩ.සන්දුන්

R A ඡන්ඨක බංගමුව

K.S.T යාපන් වැඩ

H.P. කුරුවෙල්ල

W.H සිරිපාල

T.H ගුණපත්ම

W.A කරුණාරත්න

Annex 10: The List of Beneficiaries

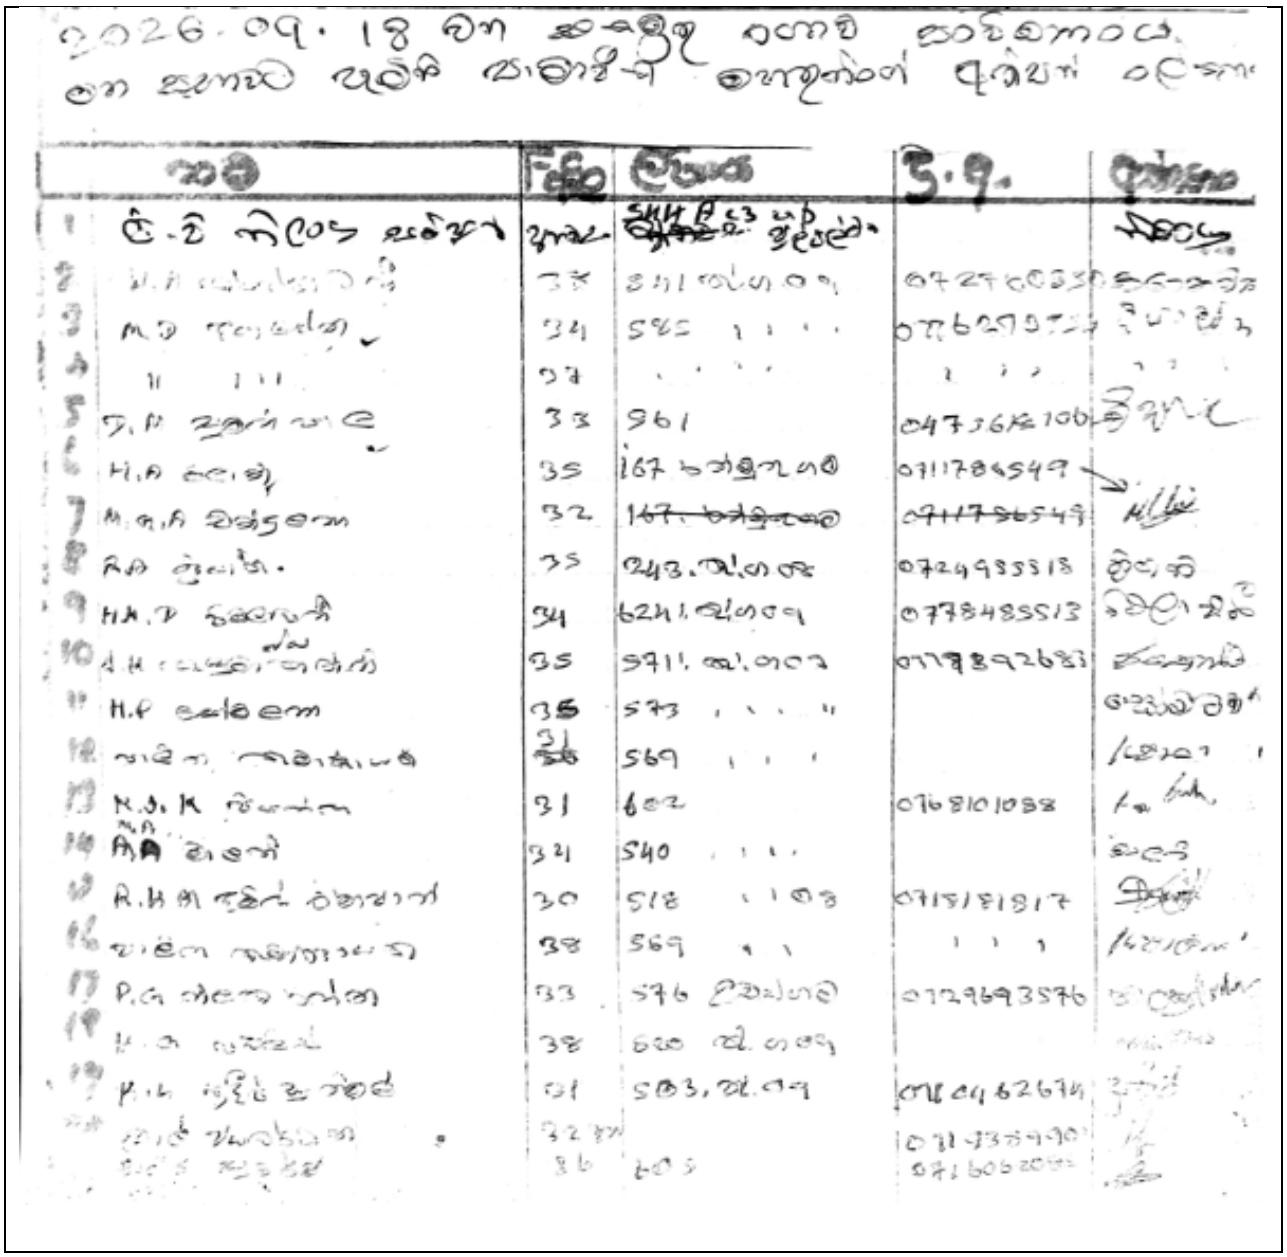

2026.09.18 වන [illegible] [illegible] [illegible]
[illegible] [illegible] [illegible] [illegible] [illegible] [illegible]

	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
1	[illegible]	[illegible]	SHH A C3 [illegible]		[illegible]
2	[illegible]	38	541 [illegible]	0727600330	[illegible]
3	M.D [illegible]	34	585 " " "	0776270[illegible]	[illegible]
4	" " "	37	" " "	" " "	" " "
5	D.M [illegible]	33	561	0473618106	[illegible]
6	H.A [illegible]	35	167 [illegible]	0711786549	
7	M.G.A [illegible]	32	~~167 [illegible]~~	~~0711786549~~	[illegible]
8	R.A [illegible]	35	243 [illegible]	0724955518	[illegible]
9	H.K.D [illegible]	34	6241 [illegible]	0778485513	[illegible]
10	[illegible]	35	5711 [illegible]	0778892683	[illegible]
11	H.P [illegible]	35	573 " " "		[illegible]
12	[illegible]	31	569 " " "		[illegible]
13	K.J.K [illegible]	31	602	0768101088	[illegible]
14	M.A [illegible]	34	540 " " "		[illegible]
15	R.H.M [illegible]	30	518 " "	0715181817	[illegible]
16	[illegible]	38	569 " "	" " "	[illegible]
17	P.G [illegible]	33	576 [illegible]	0729693576	[illegible]
18	[illegible]	38	620 [illegible]		[illegible]
19	K.L [illegible]	31	503 [illegible]	0710462674	[illegible]
20	[illegible]	32 [illegible]		0719389901	[illegible]
	[illegible]	36	605	0716062[illegible]	[illegible]

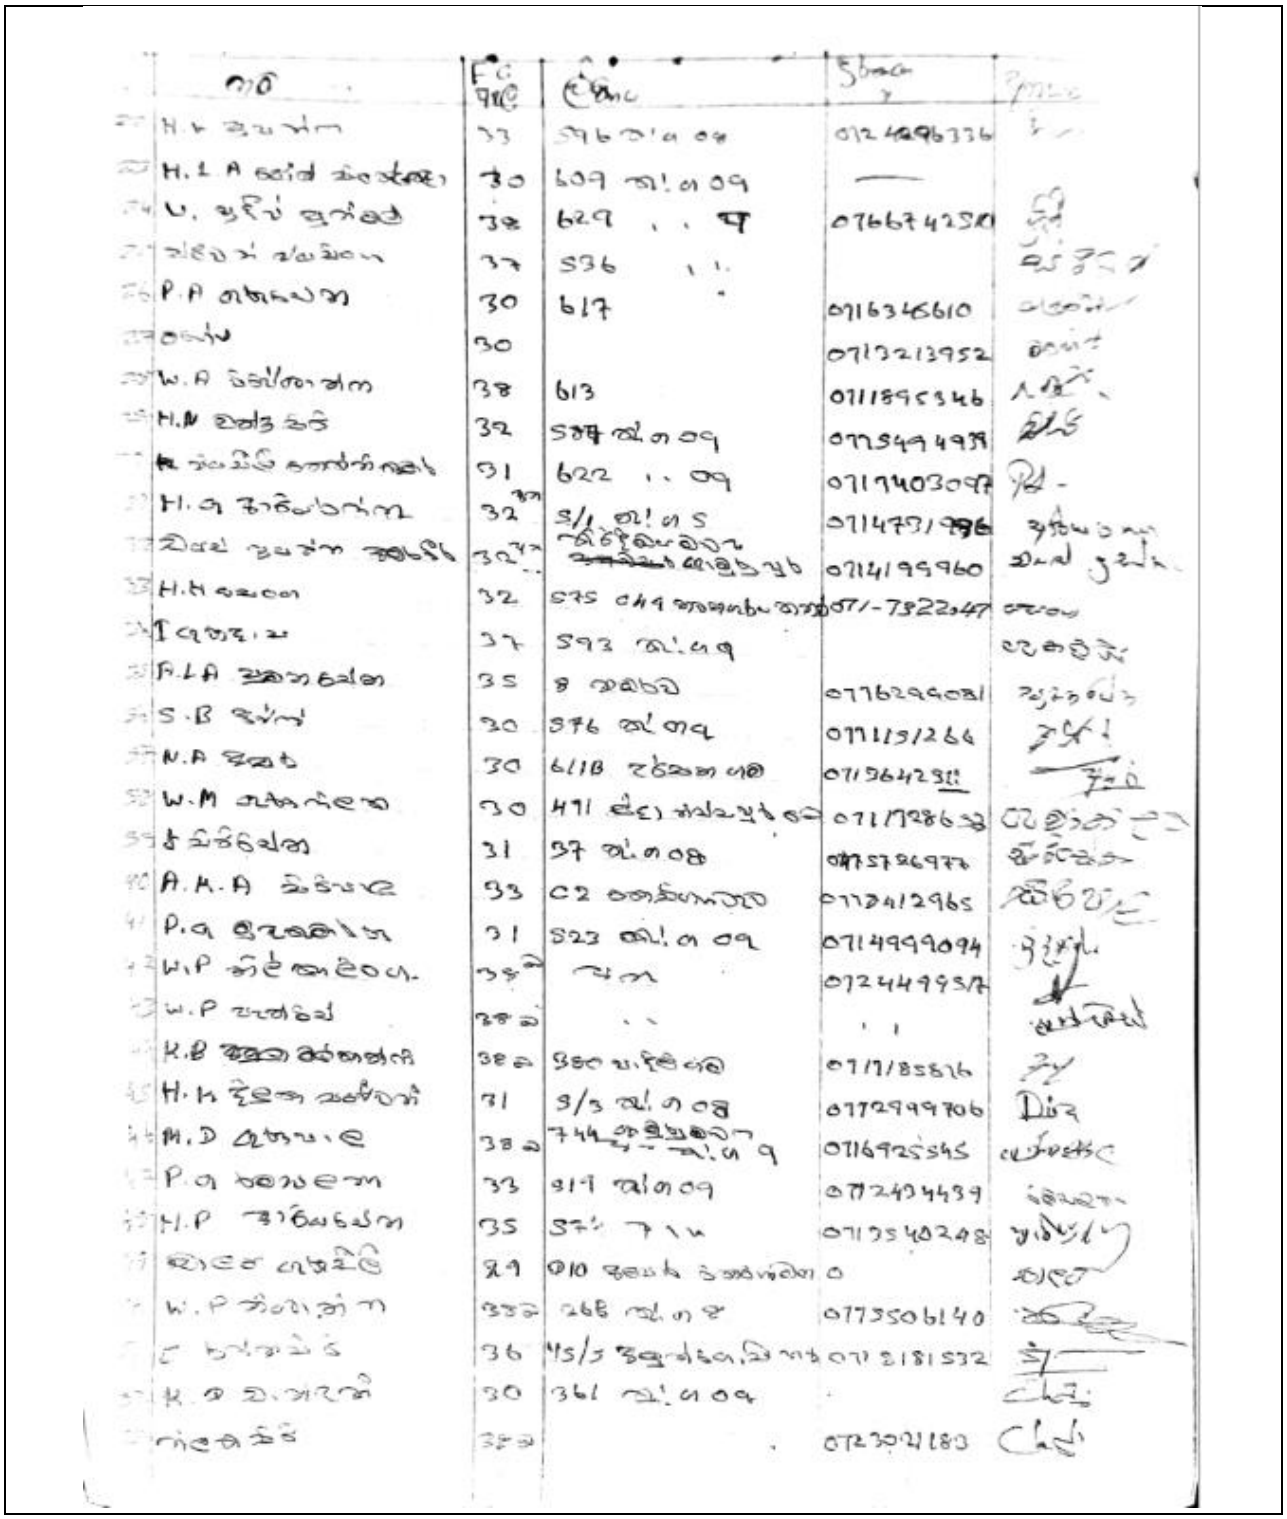

	නම	FC අංකය	ලිපිනය	දුරකථන අංකය	අත්සන
29	H.K කුසුම්කා	33	596 කැ.ග 09	0724896336	
30	H.L.A සෝම්ය සංවර්ධිකා	30	609 කැ.ග 09		
31	U. සුදිව් පුෂ්පිත	38	629 " " ඒ	0766742501	
32	කළුවැ රණසිංහ	37	536 " "		
33	P.A ගමගේ	30	617 "	0716346610	
34	ගයාන්	30		0713213952	
35	W.A විජේරත්න	38	613	0711895346	
36	H.N සන්ධ්‍ය කීර්ති	32	588 කැ.ග 09	0775494938	
37	[illegible]	31	622 " " 09	0717403097	
38	H.ග කරුණාරත්න	32	51 කැ.ග 5	0714791796	
39	සිරෙස් සුවර්ණ අමරසිරි	32	[illegible]	0714199960	
40	H.H ගෙදර	32	575 [illegible]	071-7322447	
41	I ගුණදාස	37	593 කැ.ග 09		
42	P.L.A ප්‍රසාන්ත ජයන්ත	35	8 ගමගේ	0776294088	
43	S.B ඇල්ස්	30	576 කැ.ග 09	0711152164	
44	N.A සිසිර	30	611B දර්ශන ගෙදර	0715642311	
45	W.M අමරසේකර	30	491 සීදුව සන්ධ්‍යාවත්ත	0717986338	
46	ජ සිරිවර්ධන	31	37 කැ.ග 08	0757964774	
47	A.M.A සිරිසේන	33	62 නෙක්ගහපිටිය	0772412965	
48	P.ග ඉරේෂිකා	31	523 කැ.ග 09	0714999094	
49	W.P නිල්කාන්ති ග.	38	ගම	0724499578	
50	W.P චන්ද්‍රසේන	38	"	"	
51	K.B ඇසෝකා අත්තනායක	38	356 වැදිගේ ගෙදර	0717185826	
52	H.K දිල්හානි සමීරාණී	31	3/3 කැ.ග 08	0772999706	
53	M.D ධර්මසේන	38	744 [illegible] කැ.ග 9	0716925545	
54	P.ග සමරසේකර	33	319 කැ.ග 09	0772434439	
55	H.P කාර්යවසම	35	57 [illegible]	0713540248	
56	ඔරෙල් ගෙදරිලි	29	210 අලුත්ම ඉන්ස්ටිටියුට්		
57	W.P නිමල්කා	38	268 කැ.ග 8	0773506140	
58	[illegible]	36	115/5 [illegible]	071 2181532	
59	K.ග ධර්මසේන	30	361 කැ.ග 09		
60	[illegible]	38		0723021180	

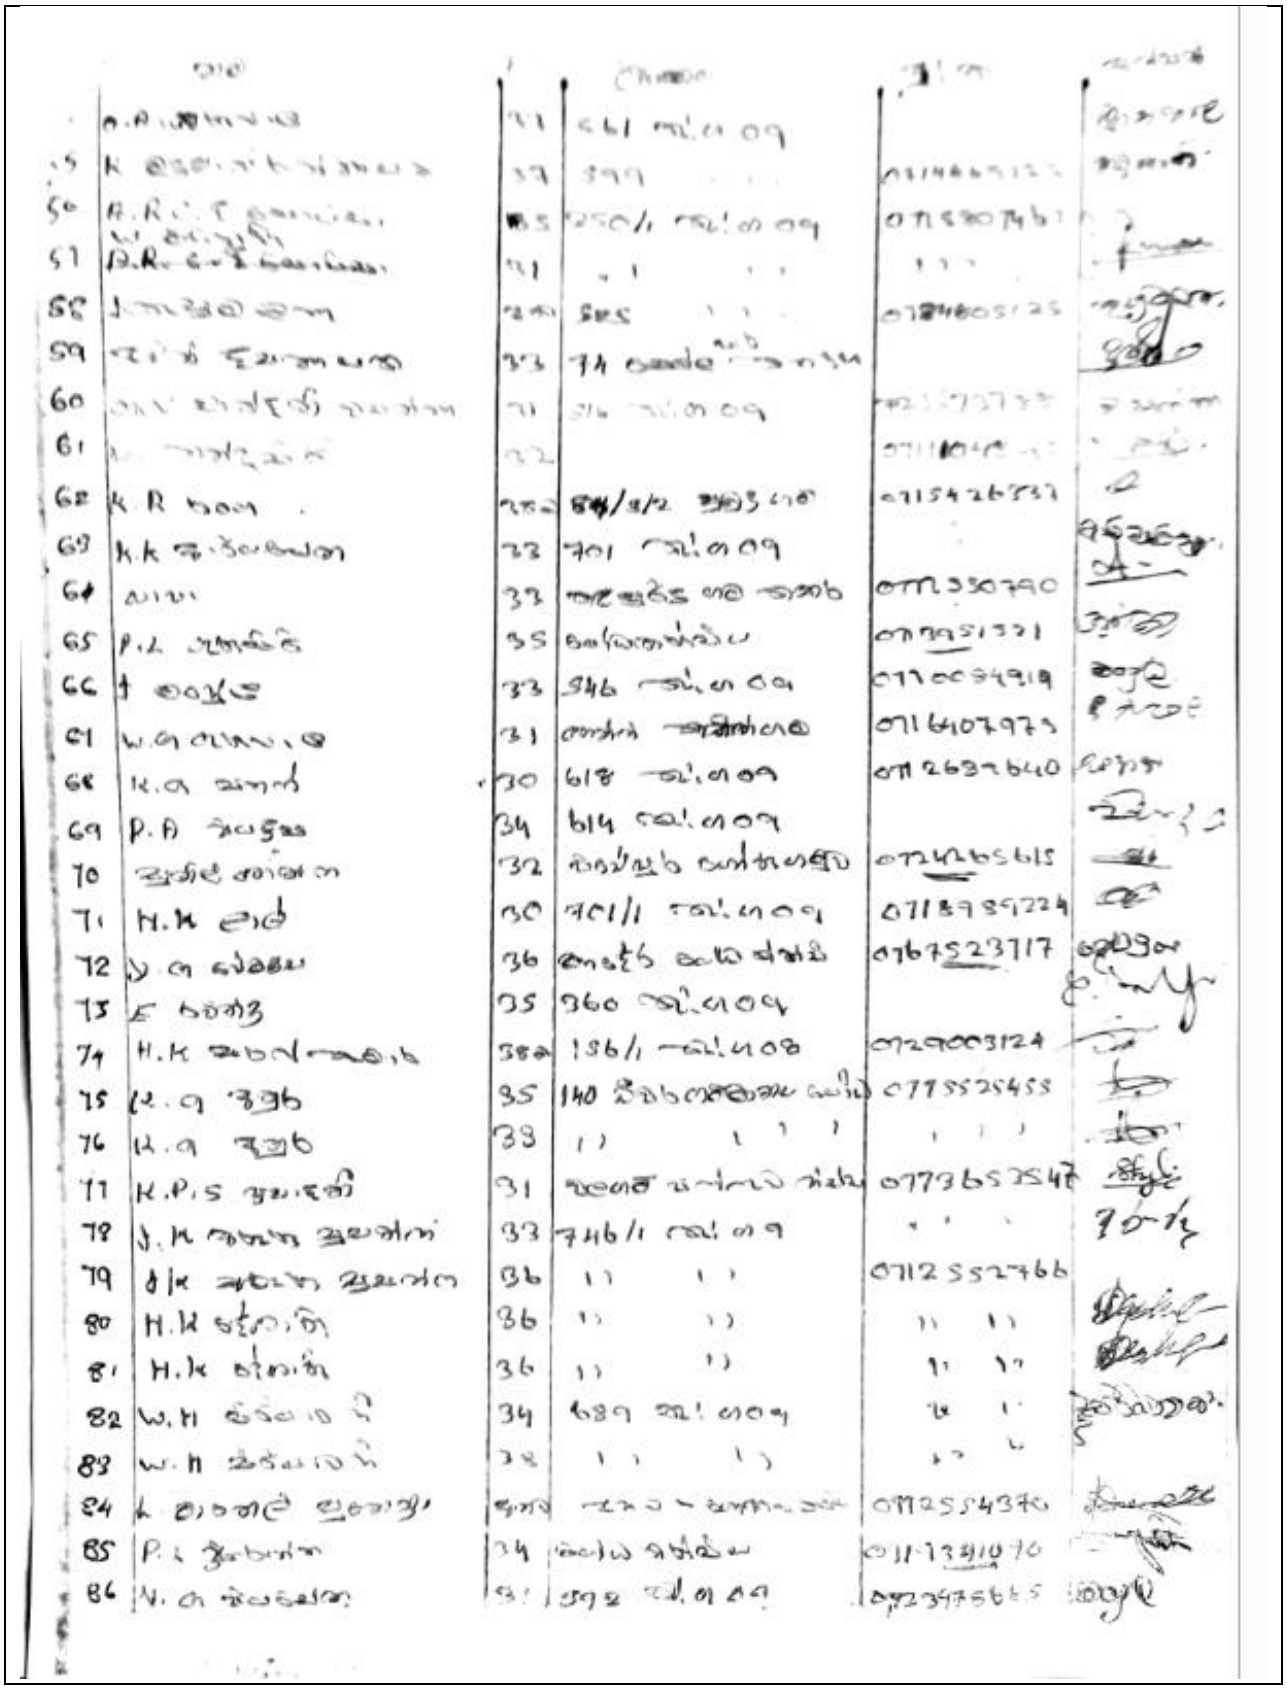

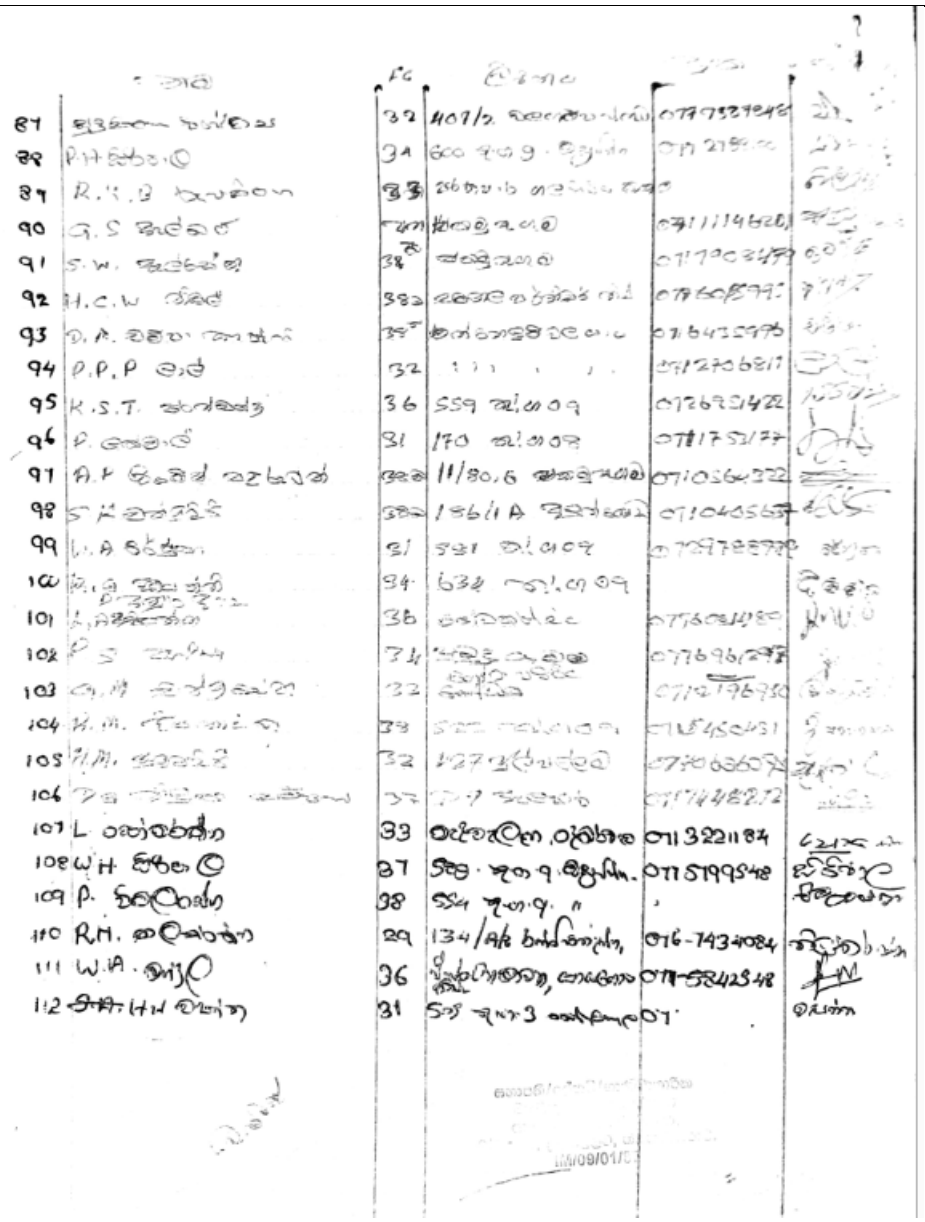

.Annex 11: Asset clearance letter of ID

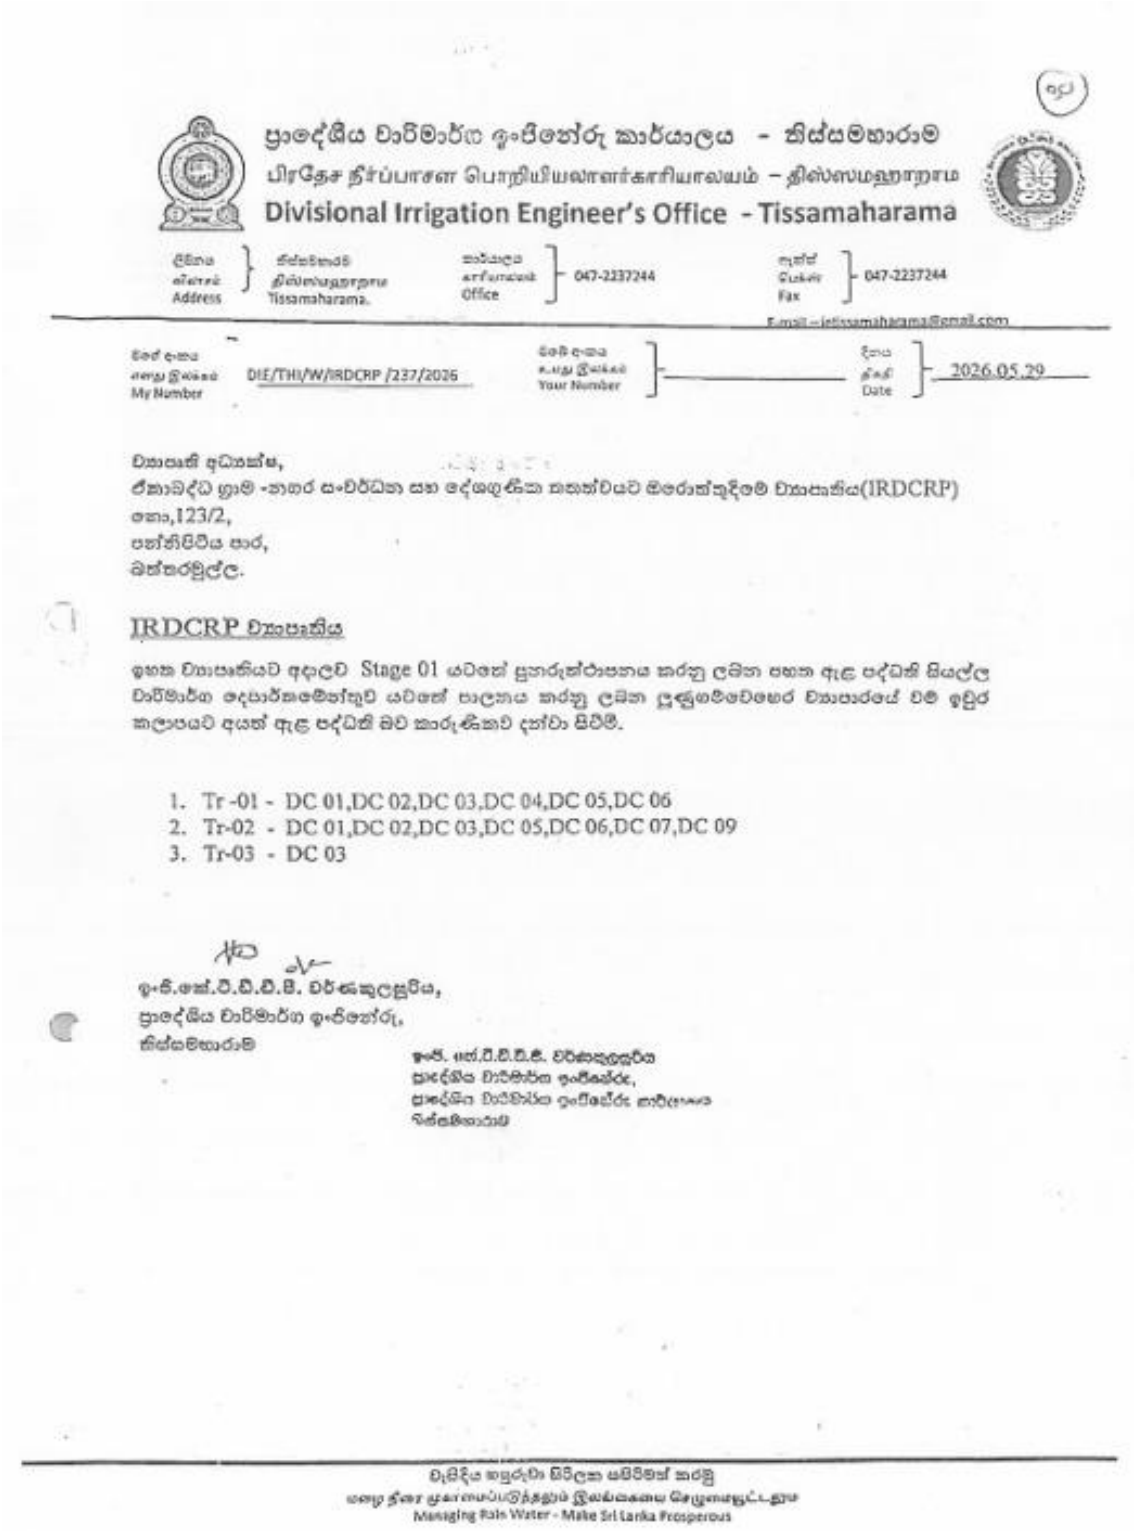

ප්‍රාදේශීය වාරිමාර්ග ඉංජිනේරු කාර්යාලය - තිස්සමහාරාම
பிரதேச நீர்ப்பாசன பொறியியலாளர்காரியாலயம் – திஸ்ஸமஹாராம
Divisional Irrigation Engineer's Office - Tissamaharama

ලිපිනය / விலாசம் / Address: තිස්සමහාරම / திஸ்ஸமஹாராம / Tissamaharama.
කාර්යාලය / காரியாலயம் / Office: 047-2237244
ෆැක්ස් / பெக்ஸ் / Fax: 047-2237244
E-mail – jetissamaharama@gmail.com

මගේ අංකය / எனது இலக்கம் / My Number: DIE/THI/W/IRDCRP /237/2026
ඔබේ අංකය / உமது இலக்கம் / Your Number: _____
දිනය / திகதி / Date: 2026.05.29

ව්‍යාපෘති අධ්‍යක්ෂ,
ඒකාබද්ධ ග්‍රාම -නගර සංවර්ධන සහ දේශගුණික තතත්වයට මරොත්තුදීමේ ව්‍යාපෘතිය(IRDCRP)
නො,123/2,
පන්නිපිටිය පාර,
බත්තරමුල්ල.

IRDCRP ව්‍යාපෘතිය

ඉහත ව්‍යාපෘතියට අදාලව Stage 01 යටතේ පුනරුත්ථාපනය කරනු ලබන පහත ඇළ පද්ධති සියල්ල වාරිමාර්ග දෙපාර්තමේන්තුව යටතේ පාලනය කරනු ලබන ලුණුගම්වෙහෙර ව්‍යාපාරයේ වම් ඉඩුර කලාපයට අයත් ඇළ පද්ධති බව කාරුණිකව දන්වා සිටිමි.

1. Tr -01 - DC 01,DC 02,DC 03,DC 04,DC 05,DC 06
2. Tr-02 - DC 01,DC 02,DC 03,DC 05,DC 06,DC 07,DC 09
3. Tr-03 - DC 03

ඉංජි.කේ.ටී.ඩී.ඩී.ඩී. වර්ණකුලසූරිය,
ප්‍රාදේශීය වාරිමාර්ග ඉංජිනේරු,
තිස්සමහාරාම

ඉංජි. කේ.ටී.ඩී.ඩී.ඩී. වර්ණකුලසූරිය
ප්‍රාදේශීය වාරිමාර්ග ඉංජිනේරු,
ප්‍රාදේශීය වාරිමාර්ග ඉංජිනේරු කාර්යාලය
තිස්සමහාරාම

වැසිදිය හසුරුවා සිරිලක සපිරිමත් කරමු
மழை நீரை முகாமைப்படுத்தலும் இலங்கையை செழுமையூட்டலும்
Managing Rain Water - Make Sri Lanka Prosperous

Annex 12: BOQs

ESTIMATE OF THE EXPENCE NECESSARY TO BE INCURRED FOR REHABILITATION OF DC 03 FROM 0+058 TO 0+660 TRACT 03 LBMC LUNUGAMWEHERA SCHEME IN TISSAMAHARAMA DIVISION - IRDCRP 2026

SUMMARY OF ESTIMATE

PACKAGE NO :-

Bill No	Description	Amount (LKR)
Bill No 01	Preliminaries(4% of Basic Cost)	464,464.48
Bill No 02	Rehabilitation of DC 03 from 0+058 TO 0+660 Tract 03 LBMC	13,469,469.82
A	Sub Total - Summary of Bills 1 & 2	13,933,934.30
B	Physical Contingencies (Approximately 10% x A)	1,392,699.32
C	Price Contingencies (3% xA)	418,018.03
D	Compliance with Environmental and Social code of Practice (ESCOP)- Provisional Sum (2.5% xA)	348,348.36
E	Sub Total (B+C+D)	2,159,065.71
F	TOTAL ESTIMATED COST (A+E)	16,093,000.00
	VAT – 18% of (F)	2,896,740.00
	Grand Total including VAT	**18,989,740.00**

Annex -02

Bill No 02 **REHABILITATION OF DC 03 FROM 0+058 TO 0+660 TRACT 03 LBMC**

OH & PF (without Preliminaries) E * = 16%

Preliminaries P = 4%

SI No	Description	Unit	Qty (A)	Rate (D=B*(1+E))	Amount F=A*D
2.1	Secondary Growth Jungle clearing and removing debries out side the reservation as directed by machinery.	ha	0.92	46,150.00	42,458.00
2.2	Felling, Logging, Uprooting trees (girth 0.5 m to 1.0 m) & removing out side of the reservation	Nos	4.00	2,639.00	10,556.00
2.3	Demolishing of exisiting damage 1:3:6 cement concrete structure or part of structure and removing debries out side the resevation as directed by manually.	m^3	13.98	7,773.00	108,666.54
2.4	Earth excavation and spoil to waste Cut 0-1.5m lift upto 1.5m spread 30m as directed by machinery.	m^3	110.54	365.50	40,402.37
2.5	Dealing with water during construction period using 50 mm dia water pump with fuel and operator	Hrs	50.00	942.50	47,125.00
2.6	Supplying & laying polythene 36/500 Gauge (150 g/m^2)	m^2	367.80	188.50	69,330.30
2.7	Mixing, Placing, compaction of Grade 15 Screed concrete (1:3:6) (Grade metal mix 5mm-25mm) including local transports. Lift up to 1.5 m haul 30 m by machinery.	m^3	18.39	36,125.00	664,338.75
2.8	Furnishing, transporting, cutting tor steel reinforcement bars (RB500) in to required sizes, bending and binding with binding wires including local transport	Kg	4908.54	526.00	2,581,892.04
2.9	Supplying making & fixing 18 mm thick Ordinary Plywood formworks for each of 6 uses & removing same once including loading and unloading.	m^2	1000.72	3,791.00	3,793,729.52

2.10	Mixing, Placing, compaction of Grade 20 concrete (1:2:4) (Grade metal mix 5mm-20mm) using poker vibrator. Slump shall be less than 150mm and curing shall be done for 28 days. Form work measured separately, including local transports.Lift up to 1.5 m haul 30 m by machinery.	m^3	110.97	40,553.00	4,500,166.41
2.11	Providing construction joint using 25 mm thick regiform sheets at 11.6m intervels as directed.	m^2	6.90	811.00	5,595.90
2.12	Supplying, Tranporting, Placing & copm. Earth in canal using 3T vibrating roller including watering. Cut 0 - 1.5m, lift upto 1.5m, haul 15000m by tractor trailor.	m^3	367.59	3,461.00	1,272,228.99
2.13	Making boundary stones for D Canal reservation path.	Nos	28.00	6,535.00	182,980.00
2.14	Furnish & install Name boards	Item	Allow	P.Sum	50,000.00
2.15	Fixing & Installing of Gauge & Current meatering the canals & draw the discharge graphs.	Item	Allow	P.Sum	100,000.00
Bill No 02 Sub Total Cost					13,469,469.82